

Tip Toggle™

UCAN introduces a new multi-use Hollow Cavity Anchor

FEATURES

- UCAN Tip Toggle™ is a versatile, steel hollow cavity wall anchor
- Assembled with 3/8-16 X 4" stud, hex nut & large pattern flat washer
- All components are zinc-plated
- Can be used with 3' or 10' rods for deeper cavities
- Pilot Hole size 7/8" (22mm)

TYPICAL APPLICATIONS

Sign mounts, Awnings, Key boxes, Towel rails, Lightweight mirror cabinets, Curtain rails, Cable and pipe clips, Cable trays, Scaffold bracing, Secondary electrical supports, Fastening to corrugated metal decks



TECH DATA VALUES

Allowable Tension Loads*	
1/2 Drywall	Hollow Concrete Block
65 lbs (0.29 kN)	404 lbs (1.8 kN)
5:1 Safety factor is included	

* Based on local materials, actual site condition may vary.

BUILDING MATERIALS

- Hollow-core concrete slabs
- Gypsum plasterboard and gypsum fibreboards
- Multiple - Layered Fascia Hollow concrete blocks
- Metal decks

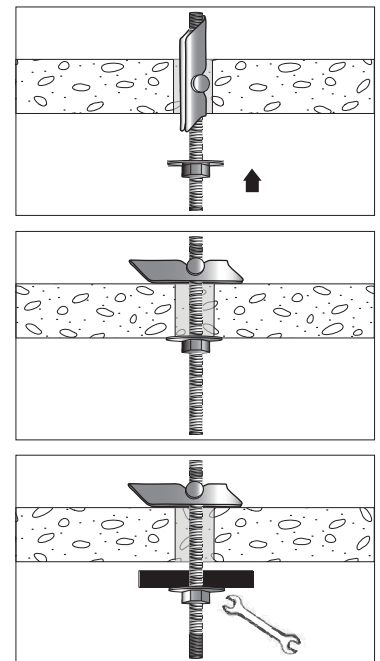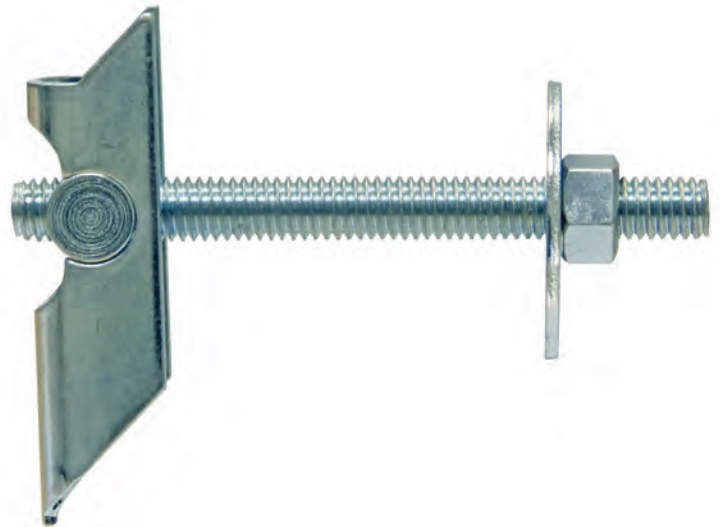

Part # UTT 384

QTY.

25 pcs Box
100 pcs Case

UCAN FASTENING PRODUCTS

155 Champagne Drive, # 10
Toronto, Ont., M3J 2C6

TEL.: 416-631-9400
FAX: 416-631-9426

E-MAIL: sales@ucanfast.com
www.ucanfast.com