

# TIP TOGGLE

## UCAN introduces a new multi-use Hollow Cavity Anchor

The Tip Toggle is a versatile, steel hollow cavity wall anchor. Assembled with 3/8-16 X 4" stud, hex nut & large pattern flat washer. All components are zinc-plated can be used with 3' or 10' Rods for deeper cavities

- Pilot Hole size 7/8" (22mm)

### TYPICAL APPLICATIONS:

Sign mounts, Awnings, Key boxes, Towel rails, Lightweight mirror cabinets, Curtain rails, Cables and pipe clips, Cable trays, Scaffold bracing, Secondary electrical supports, Fastening to corrugated metal decks


### BUILDING MATERIALS:

- Hollow-core concrete slabs.
- Gypsum plasterboard and gypsum fibreboards.
- Multiple - Layered Fascia Hollow concrete blocks
- Metal decks

### TECHNICAL DATA VALUES:

#### Recommended Tension Loads

1/2 Drywall	Hollow Concrete Block
65 lbs (0.29 kN)	404 lbs (1.8 kN)
5:1 Safety factor is included	

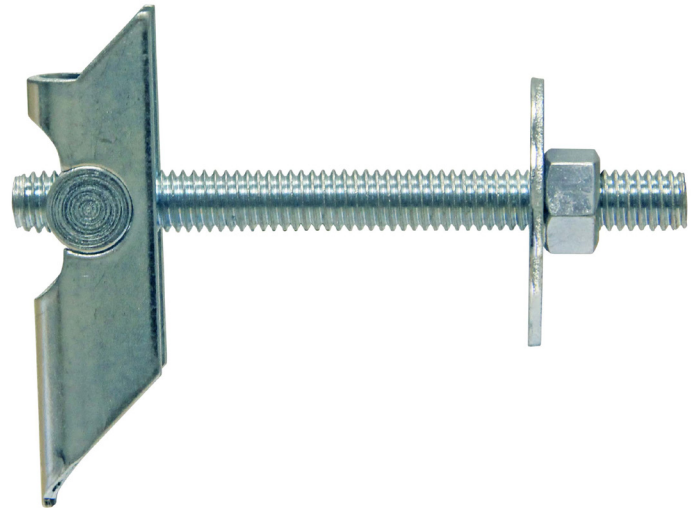

Part No.: UTT 384

**QUANTITY:**  
25 pcs./box  
100 pcs./case

### INSTALLATION:

