

UCAN

FASTENING PRODUCTS

BUILDING LASTING CONNECTIONS

DRILLING & CHISELING

- ULTRAPLUS® Four Cutter Bits
- SDS Plus Bits
- ULTRAMAX® SDS Max Bits
- Dustless Vacuum Bits
- Core Bits
- Straight Shank Bits
- SDS Plus / SDS Max Chisels
- Ti-Awl® Diamond Core Bits
- Drill Adapters & Accessories



1 - 6

ADHESIVE ANCHORING


- FLO-ROK® Cartridges & Accessories
- CRACKFAST Crack Repair Kit
- Rockite®
- Rod Accessories



6 - 8

STRUCTURAL ANCHORING

- Precast Anchors
- Hex Coupling Nuts
- Tie Wire Anchors
- Wedge Anchors
- TORPEDO® Bolts
- Heavy Load Anchors
- Drop-in Anchor and Accessories

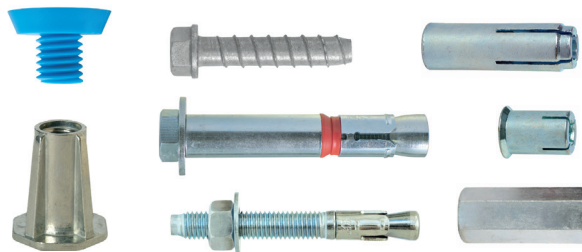

9 - 13

MASONRY ANCHORING


- Lag Shields
- Single / Double Expansion Shields
- Sleeve Anchors
- Renovation Anchor
- U-Drive Anchors & Accessories
- Zamac Pinbolts
- Nylon Pin Bolts
- Drive Screw Anchors
- Insulation Fasteners
- SCRU-IT Anchor & Accessories
- Plastic Plugs
- Alex Plugs
- Lead Anchors
- MUN Nylon Plugs



13 - 19

HOLLOW WALL ANCHORING

- Metal Hollow Wall Anchors
- TWISTER® Anchors
- Toggle Bolts
- Nylon Toggle Anchors

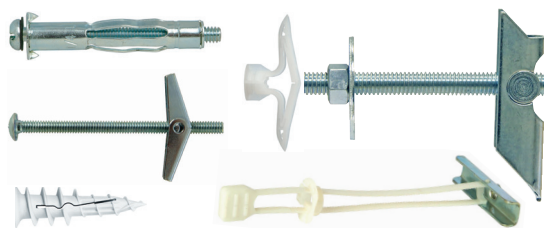

19 - 20

DIRECT FASTENING

- Low Velocity Tools and Accessories
- Power Loads
- Pins and Studs
- PAT Insulation Fasteners




21 - 23

SCREWDRIVER ACCESSORIES

- Screwdriver Accessories

METAL SCREWS AND ACCESSORIES

- U-DRILLS Self Drilling Screws
- U-DRILLS Self Tapping Screws
- Cement Board Screws
- Eye Lag Screw
- U-DRILLS Super Paks*
- Bonded EPDM Washers

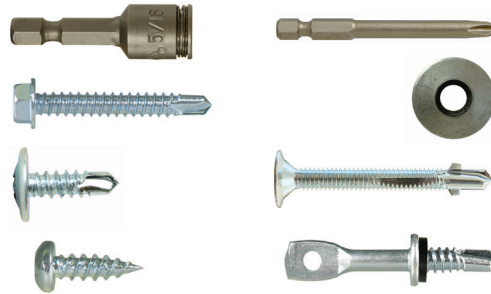

24 - 30

*SUPER PAKS

GREAT FOR TRADESMEN Super Pak Jars have a large 3-1/4" diameter opening, with a secure screw-on lid to prevent spillage. They are made of a durable crystal clear plastic so that the contents are easy to identify. Super Pak fits most service truck racking and is not too large for many tool boxes.



MASONRY ANCHORS

- Plastic Plugs
- Zamac Pin Bolts
- Nylon Pin Bolts

HOLLOW WALL ANCHORS

- Zamac TWISTER®
- Nylon TWISTER®

METAL FASTENERS OVER 50 SIZES

- Self Drilling Screws
- Sharp Point Self Tapping Screws

31 - 32



SIZES SHOWN IN **RED**
ARE NEW STOCK ITEMS.



mm SIZES SHOWN IN **GREEN**
ARE TRUE METRIC DIN STANDARD.
OTHER METRIC SIZES SHOWN
ARE METRIC CONVERSION SIZES.



TECHNICAL DATA

33 - 34

UCAN PRODUCTS ARE SUPPLIED EXCLUSIVELY BY DISTRIBUTORS COAST TO COAST.
PRICES SHOWN ARE SUBJECT TO ALL APPLICABLE SALES TAXES.
ALL WEIGHTS ARE SHOWN IN POUNDS (lb).

About UCAN

UCAN Fastening Products has specialized in the production and distribution of concrete anchors and other fastening products for over 50 years. UCAN strives to provide the most practical and cost effective solutions to meet the anticipated needs of designers and contractors. UCAN takes pride in the consistent high quality of its' products as well as the in-depth knowledge and helpfulness of its' sales staff.

Timely Delivery

UCAN keeps its Toronto warehouse well stocked with over 1,100 stock types and sizes of anchors and accessories. As a result, over 97% of all regular orders are usually filled from inventory and shipped within 3-6 hours of being placed.

Technical Services

Our technical staff and knowledgeable inside and outside sales people are readily available to provide technical assistance, product support, and field tests when required.

Innovative Products

Through a constant program of R & D, UCAN develops and improves products to meet the genuine needs of designers and contractors.

Emphasis On Quality

UCAN products are made to the highest quality standards. Each production batch is strictly quality-controlled to assure consistent performance.

Special Sizes And Custom Coatings

UCAN is especially well equipped to supply many types of application specific anchors. Custom sizes and protective coatings are available to meet design



CONCRETE DRILLING

UCAN carbide tipped drill bits are designed for fast, accurate drilling of correctly sized holes which are needed to ensure optimum anchor performance. All fractional inch sizes conform to ANSI tolerances and metric sizes adhere to DIN standards. Improved flutes remove dust efficiently to prevent heat build-up and increase bit life.

ULTRAPLUS® PREMIUM SDS PLUS

ULTRAPLUS® • Ultra fast drilling
PREMIUM SDS PLUS • Extra long life in concrete
 • Drills natural stone

Four cutter carbide tip provides superior performance in reinforced concrete, rock and granite, and extra long life in concrete compared to our regular SDS plus bit. Improved fluting reduces friction and accelerates dust removal. Will cut through rebar up to M10.



Part No.	Diameter (inch)	Length (inches)	
		Overall	Usable
SDU 3164	3/16 ANSI	4-1/4	2
SDU 3166	3/16 ANSI	6-1/4	4
SDU 144	1/4 ANSI	4-1/4	2
SDU 146	1/4 ANSI	6-1/4	4
SDU 148	1/4 ANSI	8-1/4	6
SDU 1410	1/4 ANSI	10	8
SDU 1412	1/4 ANSI	12	10
SDU 5166	5/16 ANSI	6-1/4	4
SDU 386	3/8 ANSI	6-1/4	4
SDU 3812	3/8 ANSI	12-1/4	10
SDU 3818	3/8 ANSI	18	16
SDU 126	1/2 ANSI	6-1/4	4
SDU 1212	1/2 ANSI	12-1/4	10
SDU 1218	1/2 ANSI	18	16
SDU 588	5/8 ANSI	8	6
SDU 5812	5/8 ANSI	12	10
SDU 5818	5/8 ANSI	18	16
SDU 348	3/4 ANSI	8	6
SDU 3412	3/4 ANSI	12	10
SDU 3418	3/4 ANSI	18	16
SDU 788	7/8 ANSI	8	6
SDU 7810	7/8 ANSI	10	8
SDU 7812	7/8 ANSI	12	10
SDU 112	1 ANSI	12	10
SDU 118	1 ANSI	18	16
SDU 11810	1 1/8 ANSI	10	8
SDU 11818	1 1/8 ANSI	18	16

ULTRAPLUS CONTRACTOR-PAKS

PREMIUM SDS PLUS



Part No.	Diameter (inch)	Length (inches)		Pkg Qty
		Overall	Usable	
SDU 3164B	3/16 ANSI	4-1/4	2	25
SDU 3166B	3/16 ANSI	6-1/4	4	25
SDU 144B	1/4 ANSI	4-1/4	2	25
SDU 146B	1/4 ANSI	6-1/4	4	25
SDU 386B	3/8 ANSI	6-1/4	4	25
SDU 126B	1/2 ANSI	6-1/4	4	20

SDS PLUS DRILL BITS

Dynamic, chisel shaped drill point and patented multi-flute deliver superior speed and endurance.

Manufactured to
ANSI
B 212.15 Standard



Part No.	Diameter		Length (in)		Qty.
	(in)	(mm)	Overall	Usable	
SDS 5324	5/32 ANSI	4	4-1/4	2-1/4	25
SDS 5326	5/32 ANSI	4	6-1/4	4-1/4	25
SDS 3164	3/16 ANSI	5	4-1/4	2-1/4	25
SDS 3166	3/16 ANSI	5	6-1/4	4-1/4	25
SDS 3168	3/16 ANSI	5	8-1/4	6-1/4	25
SDS 7324	7/32 ANSI	5.5	4	2	25
SDS 7326	7/32 ANSI	5.5	6-1/4	4-1/4	25
SDS 15644	15/64 DIN	6	4	2	25
SDS 15646	15/64 DIN	6	6	4	25
SDS 15648	15/64 DIN	6	8	5-3/4	25
SDS 144	1/4 ANSI	6.5	4-1/4	2-1/4	25
SDS 146	1/4 ANSI	6.5	6-1/4	4-1/4	25
SDS 148	1/4 ANSI	6.5	8-1/4	5-3/4	25
SDS 1411	1/4 ANSI	6.5	11	9	25
SDS 1420	1/4 ANSI	6.5	20	18	20
SDS 5166	5/16 ANSI	8	6-1/4	4-1/4	25
SDS 5168	5/16 ANSI	8	8	5-3/4	25
SDS 386	3/8 ANSI	9.5	6-1/4	4-1/4	25
SDS 388	3/8 ANSI	9.5	8-1/4	6-1/4	25
SDS 3812	3/8 ANSI	9.5	12-1/4	10-1/4	15
SDS 3818	3/8 ANSI	9.5	18	16	10
SDS 3824	3/8 ANSI	9.5	24	22	20
SDS 25646	25/64 DIN	10	6	4	25
SDS 25648	25/64 DIN	10	8	6	15
SDS 7166	7/16 ANSI	11	6-1/4	4-1/4	25
SDS 15326	15/32 DIN	12	6	4	25
SDS 15328	15/32 DIN	12	8	6	1
SDS 153224	15/32 DIN	12	24	22	10
SDS 126	1/2 ANSI	13	6-1/4	4-1/4	25
SDS 128	1/2 ANSI	13	8	6	25
SDS 1210	1/2 ANSI	13	10-1/4	8-1/4	25
SDS 1212	1/2 ANSI	13	12-1/4	10-1/4	20
SDS 1218	1/2 ANSI	13	18	16	20
SDS 9166	9/16 ANSI	14	6-1/4	4-1/4	20
SDS 19328	19/32 DIN	15	8	6	1
SDS 586	5/8 ANSI	16	6-1/4	4-1/4	20
SDS 588	5/8 ANSI	16	8	6	20
SDS 5812	5/8 ANSI	16	12	10	20
SDS 5818	5/8 ANSI	16	18	16	15
SDS 5824	5/8 ANSI	16	24	22	10
SDS 456412	45/64 DIN	18	12	10	10
SDS 348	3/4 ANSI	19.1	8	6	15
SDS 3412	3/4 ANSI	19.1	12	10	10
SDS 3418	3/4 ANSI	19.1	18	16	10
SDS 25328	25/32 DIN	20	8	6	20
SDS 7812	7/8 ANSI	22	12-1/4	10-1/4	10
SDS 616412	61/64 DIN	24	10	8	1
SDS 112	1 ANSI	25.4	12	10	10
SDS 118	1 ANSI	25.4	18	16	10

mm Sizes shown in **GREEN** are true metric DIN standard. Other metric sizes shown are metric conversion sizes.

ADAPTORS FOR SDS PLUS BITS



Part No.	Description
JOM SDS	SDS MAX to SDS adaptor
JOS SDS	Spline to SDS adaptor

SDS PLUS CONTRACTOR-PAKS



Manufactured to
ANSI
B 212.15 Standard

Part No.	Diameter		Length (in)		Qty.
	(in)	(mm)	Overall	usable	
SDB 5324	5/32 ANSI	4	4-1/4	2-1/4	25
SDB 5326	5/32 ANSI	4	6-1/4	4-1/4	25
SDB 3164	3/16 ANSI	5	4-1/4	2-1/4	25
SDB 3166	3/16 ANSI	5	6-1/4	4-1/4	25
SDB 3168	3/16 ANSI	5	8-1/4	6-1/4	25
SDB 144	1/4 ANSI	6.5	4-1/4	2-1/4	25
SDB 146	1/4 ANSI	6.5	6-1/4	4-1/4	25
SDB 148	1/4 ANSI	6.5	8-1/4	5-3/4	25
SDB 1411	1/4 ANSI	6.5	11	9	25
SDB 5166	5/16 ANSI	8	6-1/4	4-1/4	25
SDB 386	3/8 ANSI	9.5	6-1/4	4-1/4	25
SDB 3812	3/8 ANSI	9.5	12-1/4	10-1/4	20
SDB 15326	15/32 DIN	12	6	4	20
SDB 126	1/2 ANSI	13	6-1/4	4-1/4	20
SDB 1210	1/2 ANSI	13	10-1/4	8-1/4	20
SDB 586	5/8 ANSI	16	6-1/4	4-1/4	15
SDB 588	5/8 ANSI	16	8	6	15
SDB 788	7/8 ANSI	22	8	6	5

SDS PLUS BITS - BULK

Part No.	Diameter		Length (in)		Qty.
	(in)	(mm)	Overall	usable	
SDS 5324B	5/32 ANSI	4	4-1/4	2-1/4	250
SDS 5326B	5/32 ANSI	4	6-1/4	4-1/4	200
SDS 3164B	3/16 ANSI	5	4-1/4	2-1/4	250
SDS 3166B	3/16 ANSI	5	6-1/4	4-1/4	200
SDS 144B	1/4 ANSI	6.5	4-1/4	2-1/4	250
SDS 146B	1/4 ANSI	6.5	6-1/4	4-1/4	200
SDS 5166B	5/16 ANSI	8	6-1/4	4-1/4	150
SDS 386B	3/8 ANSI	9.5	6-1/4	4-1/4	125
SDS 126B	1/2 ANSI	13	6-1/4	4-1/4	100

SDS PLUS FORMING BITS - BULK



Part No.	Diameter		Length (in)		Qty.	Wt.
	(in)	(mm)	Overall	usable		
SFB 3166B	3/16	5	6	3-3/4	200	17

ULTRAMAX® PREMIUM SDS MAX

ULTRAMAX®
PREMIUM SDS MAX


- Ultra fast drilling
- Extra long life in concrete
- Drills natural stone

ULTRAMAX® Premium SDS MAX Drill Bit with four-cutter carbide tip provide superior performance in reinforced steel, rock, masonry and granite, and extra long life in concrete compared to our regular sds plus bit. Improved fluting reduces friction and accelerates dust removal. Will cut through rebar up to M10.



Part No.	Diameter		Length (in)	
	(in)	(mm)	Overall	Usable
MAX 1213	1/2 ANSI	13	13	8
MAX 1221	1/2 ANSI	13	21	16
MAX 91621	9/16 ANSI	14	21	16
MAX 5813	5/8 ANSI	16	13	8
MAX 5821	5/8 ANSI	16	21	16
MAX 5836	5/8 ANSI	16	36	31
MAX 456413	45/64 DIN	18	13	8
MAX 3413	3/4 ANSI	19.1	13	8
MAX 3421	3/4 ANSI	19.1	21	16
MAX 3436	3/4 ANSI	19.1	36	31
MAX 7813	7/8 ANSI	22	13	8
MAX 7821	7/8 ANSI	22	21	16
MAX 7836	7/8 ANSI	22	36	30
MAX 616413	61/64 DIN	24	13	8
MAX 113	1 ANSI	25.4	13	8
MAX 121	1 ANSI	25.4	21	16
MAX 136	1 ANSI	25.4	36	31
MAX 176414	1-9/64 DIN	28	14	10
MAX 11817	1-1/8 ANSI	29.8	17	12
MAX 11821	1-1/8 ANSI	29.8	21	16
MAX 11836	1-1/8 ANSI	29.8	36	31
MAX 11415	1-1/4 ANSI	32	15	10
MAX 11423	1-1/4 ANSI	32	23	18
MAX 11436	1-1/4 ANSI	32	36	31
MAX 13823	1-3/8 ANSI	35	23	18
MAX 13836	1-3/8 ANSI	35	36	31
MAX 11223	1-1/2 ANSI	38	23	18
MAX 13423	1-3/4 ANSI	44.5	23	18
MAX 223	2 ANSI	50.8	23	18


1/2" and 9/16" dia. are 2 cutter

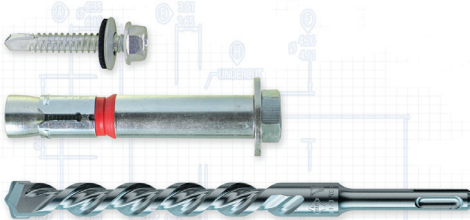

CUSTOM FASTENERS AND DRILL BITS

UCAN is especially well equipped to supply many types of custom fasteners and drill bits in both small and large quantities. Working from your specifications, we provide the exact part you need. Customer specific packaging and labelling also available.

DUSTLESS VACUUM DRILL BITS

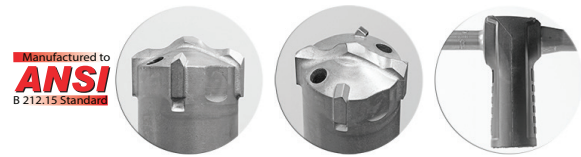

POWERFUL 4-CUTTER WITH INNOVATIVE HEAD DESIGN

- Optimal hole cleaning
- Efficient dust removal allows for continuous drilling
- Precise hole dimensions & concentricity
- Unique head design prevents stalling

TWO LARGE SUCTION HOLES

- Minimal dust buildup due to high volume suction holes
- Active head cooling results in longer drill bit life

UNIQUE SHANK & BODY GEOMETRY

- Directs the drill bit precisely within the hole
- Promotes long drill bit life

MANUFACTURED TO ANSI SPECIFICATIONS

- Ensures proper hole diameters

Supports System for OSHA regulation on Crystalline Silica Dust #29 CFR 1926.1153 when used with a HEPA filtered dust extractor

PRODUCT RANGE

Diameter 7/16" - 1-3/8"
Total length 13" - 35"

- For SDS-PLUS and SDS-MAX rotary hammers
- Bits are pre assembled with adapter



Watch video here: tinyurl.com/vacbit

SDS PLUS



- 7/16" - 5/8" single, slotted tip
- 3/4" multi-part carbide tip

Part No.	Diameter (in)	Length (in)	
		Overall	Usable
SDS 71613DL	7/16	13	7-7/8
SDS 1213DL	1/2	13	7-7/8
SDS 91614DL	9/16	14	9-1/2
SDS 5814DL	5/8	14	9-1/2
SDS 3414DL	3/4	14	9-1/2

SDS MAX




- Multi-part carbide tip

Part No.	Diameter (in)	Length (in)	
		Overall	Usable
MAX 5823DL	5/8	23-1/2	15-3/4
MAX 3423DL	3/4	23-1/2	15-3/4
MAX 7823DL	7/8	23-1/2	15-3/4
MAX 125DL	1	24-1/4	17-1/8
MAX 11835DL	1-1/8	35	27-1/2
MAX 13835DL	1-3/8	35	27-1/2

SDS MAX SINGLE PIECE CORE BITS

Each bit includes starter bit and drift key




Part No.	Diameter (in)	Diameter (mm)	Length (in)
MAX CB11222	1-1/2	38	22
MAX CB13422	1-3/4	44.5	22
MAX CB222	2	50.8	22
MAX CB25822	2-5/8	66.7	22
MAX CB31822	3-1/8	79.4	22
MAX CB31222	3-1/2	89	22
MAX CB422	4	101.6	22
MAX CB522	5	127	22
MAX CB622	6	152.4	22

ACCESSORIES

Part No.	Description
A 245970	Starter bit for 1 piece core bit
A 605215	Drift key

SDS-MAX CONNECTOR

Permits the combination of all common chuck systems with SDS-MAX bits

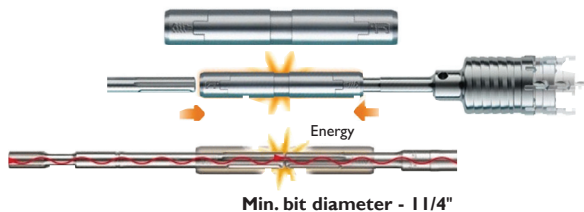

Part No.	Description
6700	Connector
6701	MAX 12" extension
6708	Spline 12" extension
6709	MAX 30" extension

ULTRAMAX® HOLE CUTTERS

Up to 80% faster drilling than core bits




The UCAN SDS MAX CORE CUTTER is specially suited for the latest generation of powerful rotary hammer tools. Its' one piece design and unique cutting head ensure efficient drilling and superior life.

Part No.	Diameter		Length (in)
	(in)	(mm)	
MAX CC134	1-3/4	44.5	22
MAX CC218	2-1/8	54	22
MAX CC212	2-1/2	63.5	22
MAX CC318	3-1/8	79.4	22

CORE BITS

For spline, SDS MAX & kango taper shanks



Part No.	Diameter		Length (in)
	(in)	(mm)	
DU6 CB2	2	52	4
DU6 CB212	2-1/2	66	4
DU6 CB258	2-5/8	68	4
DU6 CB318	3-1/8	80	4
DU6 CB312	3-1/2	90	4
DU6 CB4	4	100	4
DU6 CB5	5	125	4

CORE BIT SHANKS



Part No.	Description
MAX S18	18" (450mm) Core bit shank - SDS MAX
A 245968	8" Core bit shaft - spline
A 245969	15-3/4" Core bit shaft - spline


ACCESSORIES

A 245967	Starter bit for 2 pieces core bit
A 604214	Drift key

STRAIGHT SHANK

Rotary percussion bits for concrete and masonry

Manufactured to
ANSI
B 212.15 Standard



Faster drilling + long life = lowest cost per hole

High quality carbide tip brazed to tempered steel shank for faster drilling and longer life.

Part No.	Diameter (in)	Diameter (mm)	Length (in)	Shank Dia.	Pkg. Qty.
JOD 183	1/8	3	3	1/8	10
JOD 5323	5/32	4	3-1/2	5/32	10
JOD 5326	5/32	4	6	5/32	10
JOD 11643	11/64	4.5	3-1/4	11/64	10
JOD 3163	3/16	5	3-1/2	3/16	10
JOD 3166	3/16	5	6	3/16	10
JOD 15644	15/64	6	4	15/64	10
JOD 15646	15/64	6	6	15/64	10
JOD 144	1/4	6.5	4	1/4	10
JOD 146	1/4	6.5	6	1/4	10
JOD 1412	1/4	6.5	12	1/4	10
JOD 1424	1/2	6.5	24	1/4	10
JOD 5164	5/16	8	4-3/4	5/16	10
JOD 5166	5/16	8	6	5/16	10
JOD 386	3/8	9.5	6	3/8	10
JOD 3812	3/8	9.5	12	3/8	10
JOD 3820	3/8	9.5	20	3/8	10
JOD 3824	3/8	9.5	24	3/8	10
JOD 3840	3/8	9.5	40	3/8	10
JOD 7166	7/16	11	6	3/8	10
JOD 15326	15/32	12	6	3/8	10
JOD 126	1/2	13	6	3/8	10
JOD 1212	1/2	13	12	3/8	10
JOD 1220	1/2	13	20	3/8	10
JOD 1224	1/2	13	24	3/8	10
JOD 586	5/8	16	6	3/8	5
JOD 5812	5/8	16	12	3/8	5
JOD 5824	5/8	16	24	1/2	5
JOD 346	3/4	19	6	1/2	5
JOD 3412	3/4	19	12	1/2	5
JOD 3424	3/4	19	24	1/2	5
JOD 786	7/8	22	6	1/2	5
JOD 7812	7/8	22	12	1/2	5
JOD 16	1	25.4	6	1/2	2
JOD 112	1	25.4	12	1/2	2

mm Sizes shown in **GREEN** are true metric DIN standard. Other metric sizes shown are metric conversion sizes.

SDS PLUS CHISELS



Part No.	Length	Description
CHP S11	250 mm	10" Bull point chisel
CHI S11	250 mm	10" X 3/4" Flat
CHS S11	250 mm	10" X 1-1/2" Scaling chisel
CHG S11	280 mm	11" X 1" Gouge chisel


CHISELS FOR SDS-MAX HAMMERS



Part No.	Length	Description
CHP M12	280 mm	11" Bull point
CHP M18	450 mm	18" Bull point
CHI M12	280 mm	11" X 1" Flat
CHI M18	460 mm	18" X 1" Flat
CHS M12S	300 mm	12" X 1-1/2" Scaling chisel
CHS M12	300 mm	12" X 3" Scaling chisel
CHS M16	400 mm	16" X 2" Scaling chisel
CHG M12	300 mm	12" Gouge chisel
CHA M15	380 mm	5" X 15" Asphalt cutter
CPS M16	400 mm	5-3/8" X 16" Round spade
CHW M15	380 mm	1" X 15" Winged channel

SDS-MAX FLOOR SCRAPER

With 6" blade for removing tiles and other flooring

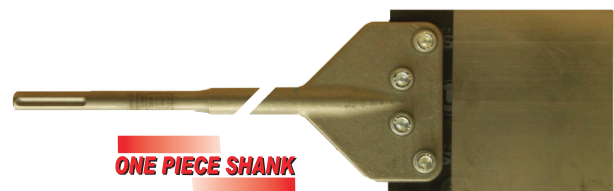

Part No.	Description
CHI MFS	6" X 25" Complete floor scraper with standard blade
MFS BLADE	Replacement blade for floor scraper
MFS KIT	Replacement blade, 2 gaskets, 8 washers, 4 nuts, 4 bolts
MFS GAS	Floor scraper gasket
MFS WASH	Floor scraper washer
MFS NUT	Floor scraper hex nut
MFS BOLT	Floor scraper bolts

Ti-Awl® TILE BIT

Ti-Awl® diamond core tile drill bits

- Fast and accurate drilling in ceramic, porcelain, marble and granite tile
- Minimizes cracking or spalling of tile when drilling
- Available in an alternate blister pack and as a complete kit.



DCC KIT

DCC GUIDE



Kit Includes:

- Aluminum case
- Six popular sizes of tile drills 1/4", 5/16", 3/8", 1/2", 5/8", 3/4"
- A clear, shatterproof, non-slip guide. Essential for accurate drilling



New size in red

Watch video here: tinyurl.com/tilebits

Part No.	Diameter
DCC 316	3/16"
DCC 14	1/4"
DCC 516	5/16"
DCC 38	3/8"
DCC 12	1/2"
DCC 58	5/8"
DCC 34	3/4"
DCC 1	1"
DCC 114	1-1/4"
DCC 138	1-3/8"
DCC 112	1-1/2"
DCC GUIDE	
DCC KIT	
DCC MP	-

The area to be drilled must always be kept wet. Lubricate the surface at least every 20 seconds while drilling. See pressure water sprayer below. Use in any rotary, non-percussion, hand drill.

PRESSURE WATER SPRAYER

ADJUSTABLE FROM MIST TO JET



Ideal for use with Ti-Awl® diamond core tile drill bits. Emits a continuous stream of spray without effort.

Part No.	Size
PWS	1 Liter pressure water sprayer

REBAR SAFETY CAP

Provide protection from protruding rebar

- High visibility colour
- Not for impalement protection



Part No.	Rebar Dia.	Pkg. Qty.	Case Qty.	Case Wt.
RSC1025C	M10 - M25	100 / Bag	500	9

ROCKITE®

SELF LEVELING POURABLE GROUT

Rockite cement is a hydraulic type cement compound that is specially formulated to give superior strength and

unsurpassed bonding qualities. When mixed with water, Rockite pours smoothly into place. It sets within 15 minutes. Within one hour, it develops a compressive strength of 4500 psi.



Ideal for:

- Patching
- Machinery mounts
- Signs
- Seats
- Railing
- Posts

Part No.	Size	Case Qty.
ROC 10	10 lb Pail	4
ROC 50	50 lb Pail	1

FLO-ROK® 5 MAX CARTRIDGES



IAPMO - ES® Listing for cracked & uncracked concrete

- MTO / MTQ Approved
- Year round use, long shelf life
- Broad working temperature range from -10°C to +30°C
- Excellent for both solid and hollow wall applications
- Smooth flowing, non-drip, easy to control
- User friendly – low odour, styrene free & MMA free
- Moisture insensitive, non sag formula
- Suitable for damp and water filled holes
- Meets LEED guidelines; low VOC



10 oz

28 oz

Watch video here: tinyurl.com/florok5



Part No.	Description	Case Qty.	Case Wt.
FR5-10 MAX	10 oz Cartridge	12	14
FR5-28 MAX	28 oz Cartridge	6	32

• Cartridge price includes 1 static mixing nozzle

CRACKFAST® CRACK REPAIR KIT



Watch video here: tinyurl.com/crackfast



Complete Kit Includes:

- Seal cartridge 300ml 2 pcs
- Resin cartridge 250ml 2 pcs
- Seal mixer nozzle 2 pcs
- Seal applicator fan 2 pcs
- Cartridge outlet plug 2 pcs
- Resin mixer nozzle w/ extension 2 pcs
- Fit connector 1 pc
- Injection port 16 pcs
- Pair of gloves 2 pcs
- Wooden spatula 2 pcs
- Instruction DVD
- PA 100 Dispensing tool extra



Part No.	Description
CFK 100	CRACKFAST Crack repair kit complete
PA 100	10oz. Manual dispensing tool (high ratio)

CRACKFAST COMPONENTS

CFS	CRACKFAST Seal cartridge 300ml
CFR	CRACKFAST Resin cartridge 250ml
PAM CFR	Resin mixer nozzle with extension tube
PAM CFS	Seal mixer nozzle
PAM FAN	Applicator fan for seal mixer nozzle
CF PORT	Insert/Injection port
CFRP	1 Resin cartridge, 1 resin mixer and 1 outlet plug

FLO-ROK® 6 SD CARTRIDGE



- High performance 1:1 pure epoxy chemical anchor
- Suitable for dynamic and vibration loading
- Seismic resistance
- Smooth flowing, non-drip, easy to control, long shelf life
- Ideal for deep hole applications & close to edge fastening
- User Friendly - low odour, extended working time
- Styrene and VOC free



Watch video here: tinyurl.com/florok6



Part No.	Description	Case Qty.	Case Wt.
FR6-20 SD	20 oz Cartridge	12	29
PA 2000	20oz. Manual dispensing tool	1	3


• Cartridge price includes 1 static mixing nozzle

ACCESSORIES



Part No.	Description
PAM 6	Standard nozzle for FR6-20 SD
PAM 6HF	High flow (9") nozzle for FR6-20 SD
PAM 6EXT	9mm X 10m Extension tube for PAM 6
PAM 6EXTW	14mm X 10m Extension tube for PAM 6HF
FR6 P18	18mm Resin stopper
FR6 P22	22mm Resin stopper
FR6 P30	30mm Resin stopper

HOLE CLEANING BRUSH



Part No.	Hole dia. (in)	rod (in)	Used For
SBR 12	1/2	3/8	-
SBR 9/16	9/16	1/2	M10
SBR 3/4	3/4	5/8	M15
SBR 7/8	7/8	3/4	-
SBR 1	1	7/8	M20
SBR 1 1/8	1-1/8	1	-
SBR 1 1/4	1-1/4	-	M25
SBR 1 3/8	1-3/8	1-1/4	-
SBR 1 1/2	1-1/2	-	M30
SBR 1 3/4	1-3/4	1-1/2	M35
SBR HND	12" Brush handle		
SBR EXT	12" Rigid extension		

FLO-ROK DISPENSING TOOLS

HEAVY DUTY CORDLESS DISPENSING TOOL

SURE SHOT TOOL



- Eliminates waste
Dispenses exact amount each time
- Powerful worm drive
- Long battery life
(Up to 25 cartridges per charge)

Part No.	Description
PA 5000K	Battery tool kit for FR5-28 MAX includes two batteries, charger and case
PA 2050K	Battery tool kit for FR6-20 SD includes two batteries, charger and case
PA BAT14V	14V Battery for PA 5000
PA BAT20V	20V Battery for PA 5000
PA CHARGER14V	Charger base for PA BAT 14V
PA CHARGER20V	Charger base for PA BAT 20V
CORD SET	Cord set for PA CHARGER

HEAVY DUTY MANUAL TOOLS



For 10 & 28 oz. Cartridges

Part No.	Description
PA100	10oz. Manual dispensing tool (high ratio)
PA3600	28oz. Manual dispensing tool

FLO-ROK STATIC MIXING NOZZLES



PAM 5812X (Nozzle and Extension)



PAM 38



Nozzle Extension

Part No.	Description
PAM 38	Mixing nozzle for 5-10 MAX
PAM 5812X	Mixing nozzle for FR5-28 MAX (O.A. length 17")
PAM EXT	Nozzle extension (Ext. O.A. length 8")

ACCESSORIES




Part No.	Description
BOP 190	Extra high volume blow out pump
FRBR1	3/8" - 1/2" Nylon brush
FRBR2	1/2" - 1" Nylon brush

ANCHOR ROD ASSEMBLIES

For adhesive anchoring

- Straight cut
- complete with nut & washer



ISO GRADE 5.8 STEEL ROD - ZINC PLATED

Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
PRA 383	3/8 X 3	10	100	10
PRA 385	3/8 X 5	10	100	14
PRA 126	1/2 X 6-1/2	10	100	37
PRA 587	5/8 X 7-1/2	10	50	31
PRA 3410	3/4 X 10	10	-	12
PRA 112	1 X 12	6	-	15

ISO GRADE 5.8 STEEL ROD - GALVANIZED ASTM A153 CLASS C

Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
PRA G126	1/2 X 6-1/2	10	100	37
PRA G588	5/8 X 8	10	50	31
PRA G3410	3/4 X 10	10	10	12
PRA G3412	3/4 X 12	6	6	9

B7 HIGH STRENGTH STEEL ROD ZINC PLATED WITH 2H NUT

Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
PRA B7125	1/2 X 5	10	100	35

STAINLESS STEEL - TYPE 304

Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
PRS4 385	3/8 X 5	10	100	14
PRS4 126	1/2 X 6-1/2	10	100	37
PRS4 587	5/8 X 7-1/2	10	50	31
PRS4 3410	3/4 X 10	10	10	12
PRS4 112	1 X 12	6	6	15


Also available: Type 316 stainless steel, special length and metric thread rod assemblies.

S.S. STEEL SCREENS FOR FR5 MAX

For hollow wall applications



Watch video here: tinyurl.com/ucansfr



Part No.	Max. rod dia. (inches)	Screen Size (inches)	Drill dia. (inches)
SFR 383	3/8	1/2 X 3	1/2
SFR 386	3/8	1/2 X 6	1/2
SFR 3810	3/8	1/2 X 10	1/2
SFR 123	1/2	5/8 X 3	5/8
SFR 126	1/2	5/8 X 6	5/8
SFR 1210	1/2	5/8 X 10	5/8
SFR 583	5/8	3/4 X 3	3/4
SFR 586	5/8	3/4 X 6	3/4
SFR 5810	5/8	3/4 X 10	3/4
SFR 5813	5/8	3/4 X 13	3/4
SFR 34512	3/4	7/8 X 5-1/2	7/8
SFR 348	3/4 - 7/8	1 X 8	1
SFR 3413	3/4 - 7/8	1 X 13	1

Important: Anchor rods should be installed immediately after FLO-ROK 5 MAX has been injected into the hole or screen. They should not be disturbed until fully cured.

PRECAST INSERTS



NEW!



Part No.	Size	Colour	Pkg. Qty.	Case Qty.	Case Wt.
UPI 12	1/2 - 13	Yellow	-	100	23
UPI 38	3/8 - 16	Green	-	100	26

ZAMAC




- Made of rustproof zamac alloy to prevent surface staining.
- Install with bolts through holes in steel forms or by means of reusable Nail-on plugs on wood forms.

Part No.	Length (in)	Thread Size	Pkg. Qty.	Case Qty.	Case Wt.
PZI 10	1 1/16	10-24	100	4000	44
PZI 15	1-1/2	1/4-20	100	800	41
PZI 24	1	3/8-16	100	1000	44
PZI 25	1-3/8	3/8-16	100	700	45
PZI 35	1-1/2	1/2-13	50	300	40
PZI 36	2-7/8	1/2-13	25	150	44
PZI 45	1-11/16	5/8-11	25	200	38
PZI 46	2-7/8	5/8-11	25	100	35
PZI 55	1-11/16	3/4-10	25	150	33
PZI 56	2-7/8	3/4-10	25	100	33

OVERSIZED-TAPPED FOR GALVANIZED BOLTS (ASTM A563)

PZI 35OT	1-1/2	1/2-13	50	300	40
PZI 45OT	1-11/16	5/8-11	25	200	38
PZI 46OT	2-7/8	5/8-11	25	100	35
PZI 55OT	1-11/16	3/4-10	25	150	33

CONCRETE INSERT PLUG - REUSABLE



- Nail-on plastic plug for wood forms
- Use with PZI and UPI

Part No.	Thread Size	Box Qty.	Case Qty.	Case Wt.
PIP 25	3/8-16	100	1,000	7
PIP 35	1/2-13	100	1,000	8
PIP 45	5/8-11	100	1,000	9

TIE WIRE ANCHORS

Zinc Plated



We invented it. Accept no substitute!

Part No.	Size	Eye Dia.	Pkg. Qty.	Case Qty.	Case Wt.
EP 932	1/4 X 2-1/4	9/32	100	1,000	38
EP932M	1/4 X 2-1/4	9/32	-	1,000	35

HOOK WEDGE

CARBON STEEL ZINC PLATED



- Fast, simple installation by hammer

Part No.	Size	Case Qty.	Case Wt.
HW38414B	3/8 X 4-1/4	250	31

ROD COUPLINGS

Zinc Plated



Part No.	Size	Length	A/F	Pkg. Qty.	Case Qty.	Case Wt.
ROD 14	1/4 - 20	7/8	3/8	100	1,000	20
ROD 516	5/16 - 18	1-1/8	1/2	100	1,000	47
ROD 38	3/8 - 16	1-1/8	1/2	100	1,000	38
ROD 38L	3/8 - 16	1-3/4	9/16	100	600	69
ROD 12	1/2 - 13	1-3/4	11/16	50	300	36
ROD 58	5/8 - 11	2-1/8	13/16	25	150	28
ROD 34	3/4 - 10	2-1/4	1	25	150	45

REDUCER COUPLINGS

ROD 3814	3/8 - 1/4 X 1	100	1,000	40
----------	---------------	-----	-------	----

BULK CARTONS

ROD 14B	1/4 - 20	7/8	3/8		2,800	53
ROD 516B	5/16 - 18	1-1/8	1/2		1,200	55
ROD 38B	3/8 - 16	1-1/8	1/2		1,300	48
ROD 38LB	3/8 - 16	1-3/4	9/16		450	51
ROD 12B	1/2 - 13	1-3/4	11/16		450	51
ROD 58B	5/8 - 11	2-1/8	13/16		250	44
ROD 34B	3/4 - 10	2-1/4	1		150	45



TORPEDO BOLT

- Available in 4 finishes : ZINC PLATED, MECHANICALLY GALVANIZED, 410 STAINLESS STEEL and 316 STAINLESS STEEL
- Use with a standard UCAN ANSI - tolerance drill bit
- Faster installation and lower edge distance requirements, compared to mechanical expansion anchors
- Undercut thread design produces consistently high load values in various concrete strengths
- One piece fastener with finished hex washer head
- Unique thread pattern permits low installation torque
- Anti-rotational head facilitates a positive lock between the bolt and the working surface for enhanced vibration resistance
- Anchor size is stamped on head for easy identification and enhanced quality control after anchor installation
- Removable
- RUSPRO® coating provides excellent resistance to atmospheric corrosion and road salt. (See specification on page 34)

*UCAN recommends Wedge Anchors for safety barriers

UCAN TORPEDO® BOLT TYPE I

ZINC PLATED



Typical applications:

- temporary anchoring (e.g., formwork, bracing, racking, shelving and material handling) or applications where fixtures may need to be moved.
- Suitable for permanent indoor applications

Not recommended for permanent exterior use or highly corrosive environments.

Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
UTB 14178Z	1/4 X 1-7/8	100	800	38
UTB 14214Z	1/4 X 2-1/4	100	800	38
UTB 143Z	1/4 X 3	100	800	46
UTB 38134Z	3/8 x 1-3/4	50	400	37
UTB 38212Z	3/8 x 2-1/2	50	400	47
UTB 383Z	3/8 x 3	50	400	54
UTB 384Z	3/8 x 4	50	400	66
UTB 385Z	3/8 x 5	25	200	41
UTB 12212Z	1/2 x 2-1/2	50	150	32
UTB 123Z	1/2 x 3	50	150	37
UTB 124Z	1/2 x 4	40	120	36
UTB 125Z	1/2 x 5	30	90	33
UTB 126Z	1/2 x 6	30	90	38
UTB 583Z	5/8 x 3	25	75	30
UTB 584Z	5/8 x 4	25	75	31
UTB 585Z	5/8 x 5	20	60	36
UTB 586Z	5/8 x 6	20	60	41
UTB 344Z	3/4 x 4	15	45	33
UTB 345Z	3/4 x 5	15	45	39
UTB 346Z	3/4 x 6	15	45	45
UTB 347Z	3/4 x 7	15	45	51

UCAN TORPEDO® BOLT TYPE II

CARBON STEEL MECHANICALLY GALVANIZED

ICC-ES® Listed ESR- 4596

(for cracked and uncracked concrete)



Typical applications:


- Fencing and railing.
- Glazing and windows attachment.
- Support ledges and sill plate attachments.

Not recommended for permanent exterior use or highly corrosive environments.

Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
UTB 14178	1/4 X 1-7/8	100	800	38
UTB 14214	1/4 X 2-1/4	100	800	38
UTB 143	1/4 X 3	100	800	46
UTB 38134	3/8 x 1-3/4	50	400	37
UTB 38212	3/8 x 2-1/2	50	400	47
UTB 383	3/8 x 3	50	400	54
UTB 384	3/8 x 4	50	400	66
UTB 385	3/8 x 5	25	200	41
UTB 12212	1/2 x 2-1/2	50	150	32
UTB 123	1/2 x 3	50	150	37
UTB 124	1/2 x 4	40	120	36
UTB 125	1/2 x 5	30	90	33
UTB 126	1/2 x 6	30	90	38
UTB 583	5/8 x 3	25	75	30
UTB 584	5/8 x 4	25	75	31
UTB 585	5/8 x 5	20	60	36
UTB 586	5/8 x 6	20	60	41
UTB 344	3/4 x 4	15	45	33
UTB 345	3/4 x 5	15	45	39
UTB 346	3/4 x 6	15	45	45
UTB 347	3/4 x 7	15	45	51

UCAN TORPEDO® BOLT TYPE III

410 STAINLESS STEEL HARDENED RUSPRO® COATED



Suitable for permanent outdoor installations. Not recommended for water and sewage plants where type 316 Stainless Steel normally used.

Typical applications:

- Curtain walls
- Clean rooms
- Stadium seating
- Agricultural facilities
- Parking structures
- Scaffolding

New sizes in red

Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
UTR 383	3/8 x 3	50	400	54
UTR 384	3/8 x 4	50	400	66
UTR 123	1/2 x 3	50	150	37
UTR 124	1/2 x 4	40	120	36
UTR 14214	1/4 X 2-1/4	100	800	39
UTR 143	1/4 x 3	100	800	47
UTR 385	3/8X5	25	75	16
UTR 12212	1/2X 2-1/2	50	150	33
UTR 125	1/2X 5	30	90	34
UTR 126	1/2 x 6	30	90	39

UCAN TORPEDO® BOLT TYPE IV

316 STAINLESS STEEL BI-METAL

SUPERIOR CORROSION RESISTANCE



Typical applications:

- Wastewater treatment
- Fertilizer storage buildings
- Marine/port restoration
- Light rail (transportation)
- Parking structures, Tunnels
- Outdoor railings in coastal environments


Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
UTB 383SS	3/8 x 3	50	200	26
UTB 384SS	3/8 x 4	50	200	33
UTB 123SS	1/2 x 3	40	160	37
UTB 124SS	1/2 x 4	30	120	35

SZ HEAVY-LOAD ANCHORS

ICC ES® Listed ESR-3304
for cracked or uncracked concrete



HEX BOLT TYPE



ISO GRADE 8.8 ZINC PLATED

Part No.	Bolt dia. (mm)	Length (mm)	Min. Emb. (mm)	Drill Size (mm)	Fastens up to (mm)	Pkg. Qty.
SHL 630	6	95	50	10	30	50
SHL 650	6	115	50	10	50	50
SHL 830	8	105	60	12	30	50
SHL 850	8	125	60	12	50	25
SHL 1025	10	116	65	15	25	25
SHL 1045	10	136	65	15	50	25
SHL 1220	12	127	80	18	20	20
SHL 1240	12	147	80	18	40	20
SHL 1620	16	150	100	24	20	10
SHL 1650	16	180	100	24	50	10
SHL 2030	20	192	125	28	30	10
SHL 2060	20	222	125	28	60	5

STAINLESS STEEL A4 (TYPE 316) WITH TITANIUM

• SHS 830	8	105	60	12	30	50
• SHS 1025	10	116	71	15	25	25
• SHS 1045	10	136	71	15	45	25
• SHS 1220	12	128	80	18	20	20
• SHS 1240	12	148	80	18	40	20
• SHS 1620	16	150	100	24	25	10
• SHS 2030	20	182	125	28	30	10

FEATURES:

- Superior fastening for dynamic and static loads.
- Expanded size range
- Available in stainless steel
- Offered in 3 different head styles - hex bolt, hex nut, countersunk and flat head.

STUD TYPE



ISO GRADE 8.8 ZINC PLATED

Part No.	Bolt dia. (mm)	Length (mm)	Min. Emb. (mm)	Drill Size (mm)	Fastens up to (mm)	Pkg. Qty.
• BHL 830	8	110	50	12	30	50
• BHL 1025	10	121	60	15	25	25
• BHL 1220	12	132	80	18	20	20
• BHL 1240	12	152	80	18	40	20
• BHL 1620	16	157	100	24	20	10
• BHL 1650	16	187	100	24	50	10
• BHL 2030	20	201	125	28	30	10
• BHL 2060	20	231	125	28	60	5

STAINLESS STEEL A4 (TYPE 316) WITH TITANIUM

• BHS 830	8	109	60	12	30	50
• BHS 1045	10	140	71	15	45	25
• BHS 1220	12	131	80	18	20	20
• BHS 1240	12	151	80	18	40	20
• BHS 1620	16	157	100	24	20	10
• BHS 2030	20	188	125	28	30	10

• Special order item / limited stock - allow 2-6 weeks for delivery.
Also available special sizes & head styles. Prices & delivery on request. Extra delivery charges may apply.

- Fast torque-up
- Anchor size = hole size
- Fully threaded
- Length ID code and "+" symbol (strength design anchor)


WEDGE ANCHORS

CARBON STEEL ZINC PLATED

Tested in accordance with AC 193
(for cracked and uncracked concrete)



IAPMO ES®
Listed ER-0373



Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
WED 14134	1/4 X 1-3/4	100	800	27
WED 14214	1/4 X 2-1/4	100	800	31
WED 14314	1/4 X 3-1/4	100	800	38
WED 38214	3/8 X 2-1/4	50	400	35
WED 38234	3/8 X 2-3/4	50	400	40
WED 383	3/8 X 3	50	400	42
WED 38334	3/8 X 3-3/4	50	400	49
WED 385	3/8 X 5	100	300	45
WED 12234	1/2 X 2-3/4	50	150	29v
WED 12334	1/2 X 3-3/4	50	150	35
WED 12412	1/2 X 4-1/2	50	150	38
WED 12512	1/2 X 5-1/2	50	150	47
WED 127	1/2 X 7	25	75	31
WED 12812	1/2 X 8-1/2	25	75	36
WED 1210	1/2 X 10	25	75	43
WED 58312	5/8 X 3-1/2	25	75	31
WED 58412	5/8 X 4-1/2	25	75	36
WED 585	5/8 X 5	25	75	40
WED 586	5/8 X 6	25	75	44
WED 587	5/8 X 7	20	60	52
WED 58812	5/8 X 8-1/2	20	60	61
WED 5810	5/8 X 10	15	45	47
WED 34414	3/4 X 4-1/4	20	60	52
WED 34434	3/4 X 4-3/4	20	60	55
WED 34512	3/4 X 5-1/2	20	60	50
WED 34614	3/4 X 6-1/4	15	45	54
WED 347	3/4 X 7	15	45	45
WED 34812	3/4 X 8-1/2	10	30	53
WED 3410	3/4 X 10	10	30	42
WED 3412	3/4 X 12	10	30	49
WED 786	7/8 X 6	10	30	38
WED 788	7/8 X 8	10	30	48
WED 7810	7/8 X 10	5	15	39
WED 16	1 X 6	10	30	46
WED 19	1 X 9	5	15	34
WED 112	1 X 12	5	15	59
WED 1149	1-1/4 X 9	4	12	56
WED 11412	1-1/4 X 12	4	12	49

NOTE: For wedge anchor length identification chart refer to page 33

WEDGE ANCHORS


CARBON STEEL ZINC PLATED

With Coupling Nut

- Letter Coded Studs
- Long Thread Design



IAPMO ES®
Listed ER-0373



NEW!

Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
WED 383C	3/8 X 3	50	200	41
WED 12234C	1/2 X 2-3/4	40	120	32
WED 58312C	5/8 X 3-1/2	20	60	30
WED 34414C	3/4 X 4-1/4	15	45	37

WEDGE ANCHORS

CARBON STEEL MECHANICAL GALVANIZED



Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
WAG 38234	3/8 X 2-3/4	50	400	38
WAG 38334	3/8 X 3-3/4	50	400	51
WAG 12334	1/2 X 3-3/4	50	150	35
WAG 12412	1/2 X 4-1/2	50	150	42
WAG 12512	1/2 X 5-1/2	50	150	50
WAG 58412	5/8 X 4-1/2	25	75	37
WAG 586	5/8 X 6	25	75	45
WAG 34414	3/4 X 4-1/4	20	60	52
WAG 34512	3/4 X 5-1/2	20	60	50
WAG 347	3/4 X 7	15	45	46

WEDGE ANCHORS

STAINLESS STEEL TYPE 304



Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
ISS 14134	1/4 X 1-3/4	100	800	27
ISS 14214	1/4 X 2-1/4	100	800	31
ISS 14314	1/4 X 3-1/4	100	800	38
ISS 38214	3/8 X 2-1/4	50	400	35
ISS 38234	3/8 X 2-3/4	50	400	40
ISS 383	3/8 X 3	50	400	42
ISS 38334	3/8 X 3-3/4	50	400	49
ISS 385	3/8 X 5	100	300	45
ISS 12234	1/2 X 2-3/4	50	150	29
ISS 12334	1/2 X 3-3/4	50	150	35
ISS 12412	1/2 X 4-1/2	50	150	39
ISS 12512	1/2 X 5-1/2	50	150	47
ISS 127	1/2 X 7	25	75	31
ISS 58312	5/8 X 3-1/2	25	75	31
ISS 58412	5/8 X 4-1/2	25	75	36
ISS 586	5/8 X 6	25	75	44
ISS 34414	3/4 X 4-1/4	20	60	52
ISS 34512	3/4 X 5-1/2	20	60	50
ISS 347	3/4 X 7	15	45	45
ISS 3410	3/4 X 10	10	30	42
ISS 16	1 X 6	10	30	47

STAINLESS STEEL TYPE 316

IST 14134	1/4 X 1-3/4	100	800	27
IST 14214	1/4 X 2-1/4	100	800	31
IST 14314	1/4 X 3-1/4	100	800	38
IST 38214	3/8 X 2-1/4	50	400	35
IST 38234	3/8 X 2-3/4	50	400	40
IST 38334	3/8 X 3-3/4	50	400	49
IST 385	3/8 X 5	100	300	45
IST 12234	1/2 X 2-3/4	50	150	29
IST 12334	1/2 X 3-3/4	50	150	35
IST 58412	5/8 X 4-1/2	25	75	36
IST 586	5/8 X 6	25	75	44
IST 587	5/8 X 7	20	60	52
IST 34414	3/4 X 4-1/4	25	75	52
IST 347	3/4 X 7	15	45	45

MINIMUM EMBEDMENT FOR WEDGE ANCHORS

Size (inch)	1/4	3/8	1/2	5/8	3/4	7/8	1	1-1/4
Emb (inch)	1-1/8	1-5/8	2-1/4	2-3/4	3-1/4	4	4-1/2	5-1/2

DROP-IN ANCHOR SYSTEM

Zinc Plated



(for cracked and uncracked concrete)



METRIC O/D

Part No.	Thread Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
IPA 14516	1/4	8MM	100	2,000	29
IPA 381532	3/8	12MM	50	1,000	53

FRACTIONAL O/D

IPA 1438	1/4	3/8	100	2,000	45
IPA 3812	3/8	1/2	50	1,000	61
IPA 1258	1/2	5/8	50	500	58
IPA 5878	5/8	7/8	25	100	32
IPA 341	3/4	1	25	100	49

STAINLESS STEEL (TYPE 304)

IPS 1438	1/4	3/8	100	2,000	42
IPS 3812K	3/8	1/2	50	1000	61
IPS 1258	1/2	5/8	50	500	56
IPS 5878	5/8	7/8	25	100	32
IPS 341	3/4	1	25	100	49

COIL THREADED DROP-IN ANCHORS

Zinc Plated and Knurled



Part No.	Thread Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
CTD 1258	1/2	5/8	50	500	59
CTD 341	3/4	1	25	100	49

DROP-IN SETTING TOOL



Depth control SDS PLUS bits



Auto setting tool for use with SDS hammer drill



Auto setting tool

For best results use UCAN depth control bits and setting tools only.

New sizes in red

Part No.	Anchor Size
IPAST 14	1/4
IPAST 38	3/8
IPAST 12	1/2
IPAST 58	5/8
IPAST 34	3/4
SDS ST38	3/8 SDS Auto setting tool
SDS ST12	1/2 SDS Auto setting tool
SDS ST34	3/4 SDS Auto setting tool
SDS STUBIDC	1/2 X 3/4" SDS DEPTH CONTROL BIT FOR DIS 3812
SDS 1438DC	3/8 X 1" SDS DEPTH CONTROL BIT FOT IPA1438
SDS 3812DC	1/2 X 1-1/16 SDS PLUS depth control bit for IPA 3812
SDS 1258DC	5/8 X 2-1/16 SDS PLUS depth control bit for IPA 1258

LAG SHIELDS

Rust Proof Zamac



SHORT

Part No.	Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
LAS 14	1/4 X 1	1/2	50	500	12
LAS 516	5/16 X 1-1/4	1/2	50	500	13
LAS 38	3/8 X 1-3/4	5/8	50	500	26
LAS 12	1/2 X 2	3/4	25	250	21

LONG

LAL 14	1/4 X 1-1/2	1/2	50	500	17
LAL 516	5/16 X 1-3/4	1/2	50	500	16
LAL 38	3/8 X 2-1/2	5/8	50	300	24
LAL 12	1/2 X 3	3/4	25	150	19

SINGLE-EXPANSION SHIELDS

Rust Proof Zamac



Part No.	Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
USA 14	1/4 X 1-5/16	1/2	50	500	13
USA 516	5/16 X 1-1/2	5/8	50	500	25
USA 38	3/8 X 1-1/2	5/8	50	500	23
USA 12	1/2 X 2	7/8	25	150	18
USA 58	5/8 X 2-5/8	1	25	150	28
USA 34	3/4 X 2-3/4	1-1/4	10	60	19

DOUBLE-EXPANSION SHIELDS

Rust Proof Zamac




Part No.	Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
UDA 14	1/4 X 1-3/8	1/2	50	500	14
UDA 516	5/16 X 1-5/8	5/8	50	500	28
UDA 38	3/8 X 2	3/4	50	300	28
UDA 12	1/2 X 2-1/2	7/8	25	150	22
UDA 58	5/8 X 2-3/4	1	25	150	31
UDA 34	3/4 X 4	1-1/4	10	60	27

STUBi DROP-IN ANCHOR

Zinc Plated

3/8" Short Drop-in anchor for hollow core slabs and other shallow embedment requirements



Part No.	Thread Size	Drill Size	Box. Qty.	Case Qty.
DIS 3812	3/8	1/2	100	1000

SETTING TOOL FOR STUBi

Part No.	Anchor size
DISST 38	3/8
SDS DISST 38	SDS AUTO SETTING TOOL FOR DIS 3812
SDS 1438DC	3/8 X 1" SDS DEPTH CONTROL BIT FOT IPA1438

SLEEVE ANCHORS

ACORN NUT

Zinc Plated



Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
SLE 14138	1/4 X 1-3/8	100	1,000	25
SLE 14214	1/4 X 2-1/4	100	1,000	35

HEX NUT

Zinc Plated



Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
SLE 516112	5/16 X 1-1/2	100	1,000	40
SLE 516212	5/16 X 2-1/2	100	600	36
SLE 38178	3/8 X 1-7/8	50	500	36
SLE 383	3/8 X 3	50	300	32
SLE 12214	1/2 X 2-1/4	25	250	34
SLE 123	1/2 X 3	25	150	26
SLE 124	1/2 X 4	25	150	30
SLE 126	1/2 X 6	25	100	30
SLE 58214	5/8 X 2-1/4	25	150	38
SLE 58414	5/8 X 4-1/4	10	60	26
SLE 586	5/8 X 6	10	40	23
SLE 34212	3/4 X 2-1/2	10	60	27
SLE 34414	3/4 X 4-1/4	10	60	39
SLE 34614	3/4 X 6-1/4	10	40	33

FLAT HEAD - PHILLIPS

Zinc Plated



Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
SLF 14138	1/4 X 1-3/8	100	1,000	19
SLF 142	1/4 X 2	100	1,000	26
SLF 143	1/4 X 3	100	1,000	36
SLF 144	1/4 X 4	100	1,000	45
SLF 14514	1/4 X 5-1/4	100	600	35
SLF 516212	5/16 X 2-1/2	100	600	28
SLF 516312	5/16 X 3-1/2	100	600	38
SLF 38234	3/8 X 2-3/4	50	500	41
SLF 384	3/8 X 4	50	300	33
SLF 385	3/8 X 5	50	300	41
SLF 386	3/8 X 6	50	300	49


HEX NUT STAINLESS STEEL TYPE 304



Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
SLS 14138	1/4 X 1-3/8	100	1,000	23
SLS 516112	5/16 X 1-1/2	100	1,000	39
SLS 516212	5/16 X 2-1/2	100	600	34
SLS 38178	3/8 X 1-7/8	50	500	33
SLS 383	3/8 X 3	50	300	32
SLS 123	1/2 X 3	25	150	27
SLS 124	1/2 X 4	25	150	30
SLS 126	1/2 X 6	25	100	30

HEX BOLT TYPE SLEEVE ANCHORS

Zinc Plated



With ISO Grade 6.8 Bolt

Part No.	Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
SLB 38178	3/8 X 1-7/8	3/8	50	500	40
SLB 38214	3/8 X 2-1/4	3/8	50	500	45
SLB 383	3/8 X 3	3/8	50	300	34
SLB 12214	1/2 X 2-1/4	1/2	25	250	37
SLB 12234	1/2 X 2-3/4	1/2	25	250	41
SLB 124	1/2 X 4	1/2	25	150	33


METAL FRAME ANCHOR

- Galvanized and fire resistant
- Allows easy spacing of frame



Part No.	Size (mm)	Drill Size	Pkg. Qty.	Pkg. Wt.
MMR 110	10 X 110	10mm	100	12
MMR 130	10 X 130	10mm	100	10

MBS RENOVATION ANCHOR



Typical applications:

- These long length heavy duty nylon anchors complete with screws. They can be used as wall tie anchors, spacing anchors, frame anchors, and for many other applications.

Part No.	Length	Drill (mm)	Pkg. Qty.
MBS 1012	4-3/4	10	50
MBS 1014	5-1/2	10	50
MBS 1016	6-1/4	10	50

Also available with stainless steel screws and lengths up to 300mm

TWO HOLE ANGLE CLIP

- For use with fasteners such as Pin Bolts & SCRU-IT Anchors

Zinc Plated



Part No.	Pkg. Qty.	Case Qty.
AC 341	100	1,000

U-DRIVE® U-DRIVE® MASONRY ANCHOR SYSTEM

- Permanent and cost effective anchoring
- Quick, easy installation without special tools
- Requires only 1" (25mm) embedment

- Hot dip galvanized for maximum corrosion protection
- High pull out and shear strength

U-DRIVE® ANCHORS



One drill bit included with each package of 100 anchors



Part No.	Anchor Length	Fastens up to	Pkg. Qty.	Case Qty.	Case Wt.
INS 118	1-1/8	1/8	100	1,000	14
INS 112	1-1/2	1/2	100	1,000	20
INS 2	2	1	100	1,000	24
INS 212	2-1/2	1-1/2	100	1,000	29
INS 3	3	2	100	1,000	33
INS 312	3-1/2	2-1/2	100	1,000	40
INS 4	4	3	100	1,000	44
INS 412	4-1/2	3-1/2	100	600	30
INS 5	5	4	100	600	32

MAGNUM PACKS

Drill Bits not included

Part No.	Anchor Length	Fastens up to	Case Qty.	Case Wt.
INS 118M	1-1/8	1/8	1,000	14
INS 112M	1-1/2	1/2	1,000	17
INS 2M	2	1	1,000	22
INS 212M	2-1/2	1-1/2	1,000	27
INS 3M	3	2	1,000	32
INS 312M	3-1/2	2-1/2	1,000	39
INS 4M	4	3	500	22
INS 412M	4-1/2	3-1/2	500	24
INS 5M	5	4	500	26

For best results use with IND/IDS bits

U-DRIVE DRILL BITS

Straight shank



Part No.	Size	Maximum Fastener Length
IND 312	.202 X 3-1/2	2
IND 412	.202 X 4-1/2	3
IND 512	.202 X 5-1/2	4
IND 712	.202 X 7-1/2	6
IND 812	.202 X 8-1/2	7

SDS BITS "ANSI"



Part No.	Size	Maximum Fastener Length
IDS 4	.202 X 4	1-1/2
IDS 6	.202 X 6	3-1/2
IDS 9	.202 X 8-3/8	7

U-DRIVE STRESS PLATE

Required when fastening insulation

- Super low profile
- Can also be used with SCRUI-T



Part No.	Diameter	Type	Case Qty.	Pkg. Wt.
SP 1M	3"	Plastic	500	24

E.I.F.S. DISCS

- Made from high grade polymer for long service life
- Accepts screws and nails

TYPE PM

Universal disc for Polymer Modified (PM) and Modified PB EIFS to fasten rigid insulation to wood, steel, concrete, and masonry.

- Low surface profile



Part No.	Diameter	Case Qty.
EID 134M	1-3/4" (45MM)	1,000

TYPE PB

For installing Expanded Polystyrene (EPS) insulation board for Polymer Based (PB) EIFS to wood, steel, concrete and masonry.

- Stem sets into insulation



Part No.	Diameter	Case Qty.
EIDS 2M	2" (50MM)	1,000

ZAMAC PIN BOLTS

WITH ZINC PLATED STEEL NAIL



Part No.	Size	Pkg. Qty.	Case Qty.	Case Wt.
ZAM 31678 *	3/16 X 7/8	100	1,000	15
ZAM 141 *	1/4 X 1	100	1,000	19
ZAM 14114 *	1/4 X 1-1/4	100	1,000	23
ZAM 14112	1/4 X 1-1/2	100	1,000	26
ZAM 142	1/4 X 2	100	1,000	32
ZAM 143	1/4 X 3	100	600	28

* Available in Super Pak Jar (See Page 32)

WITH STAINLESS STEEL NAIL

ZAM 141SS	1/4 X 1	100	1,000	19
ZAM 14114SS	1/4 X 1-1/4	100	1,000	23
ZAM 14112SS	1/4 X 1-1/2	100	1,000	26
ZAM 142SS	1/4 X 2	100	1,000	32

BULK PACK WITH ZINC PLATED STEEL NAIL

Part No.	Size	Case Qty.	Case Wt.
ZAM 31678B	3/16 X 7/8	5,000	46
ZAM 141B	1/4 X 1	2,500	48
ZAM 14114B	1/4 X 1-1/4	2,000	45
ZAM 14112B	1/4 X 1-1/2	1,800	46
ZAM 142B	1/4 X 2	1,250	40
ZAM 143B	1/4 X 3	700	31

NYLON PIN BOLTS

WITH ZINC PLATED STEEL NAIL



Mushroom head (M)



Round head (R)

Part No.	Size	Head Style	Pkg. Qty.	Case Qty.	Case Wt.
NYL 3161	3/16 X 1	M	100	1,000	5
NYL 3161R	3/16 X 1	R	100	1,000	5
NYL 316112R	3/16 X 1-1/2	R	100	1,000	7
NYL 1434 *	1/4 X 3/4	M	100	1,000	5
NYL 141 *	1/4 X 1	M	100	1,000	6
NYL 14112 *	1/4 X 1-1/2	M	100	1,000	9
NYL 142	1/4 X 2	M	100	1,000	11
NYL 143	1/4 X 3	M	100	600	12

Also available in bulk cartons

WITH NYLON NAIL

NNY 14112	1/4 X 1-1/2	M	100	1,000	9
-----------	-------------	---	-----	-------	---

INSULATION FASTENERS

2-3/8" HEAD DIAMETER

- All Plastic
- Not for structural support
- Plastic body eliminates thermal transfer



Part No.	Drill Size	Overall Length	Grip Range	Pkg. Qty.	Pkg. Wt.
MJL 234	5/16	2-3/4	1-1-1/2	250	3
MJL 334	5/16	3-3/4	2-2-1/2	250	4
MJL 412	5/16	4-1/2	2-1/2-3	250	5

NYLON DRIVE SCREW ANCHORS

- Install with a hammer - remove with a screwdriver
- Nylon 6 body resists high and low temperatures
- Collapsible body ensures positive clamping
- Lock-in feature avoids pre-expansion

ROUND HEAD - PHILLIPS DRIVE SCREW



Part No.	Drill dia. (mm)	Length (mm)	Fastens up to (mm)	Pkg. Qty.	Case Qty.	Case Wt.
MNA 530	5	50	5	100	2,400	18
MNA 550	5	50	25	100	2,400	24
MNA 635	6	35	10	100	2,400	26
MNA 650	6	50	25	100	1,800	20
MNA 670	6	70	45	100	1,200	22

COUNTERSINK HEAD - PHILLIPS DRIVE SCREW




MNA 850	8	50	15	100	900	18
MNA 860	8	60	25	100	900	21
MNA 880	8	80	45	100	600	18
MNA 8100	8	100	60	100	600	21

ROUND HEAD - SQUARE SOCKET DRIVE SCREW



MNA 635R	6	40	15	100	2400	26
----------	---	----	----	-----	------	----

ROUND / COUNTERSINK HEAD 304 STAINLESS STEEL PHILLIPS DRIVE SCREW

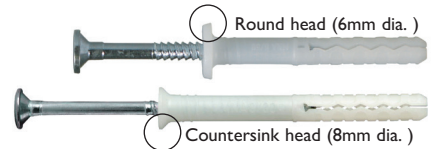

MNA 635SS	6	35	10	100	2,400	26
MNA 650SS	6	50	25	100	1,800	20
MNA 880SS	8	80	45	100	600	18

Note: Always drill holes 6mm deeper than embedment

INSULATION FASTENERS

- All Plastic
- Plastic body eliminates thermal transfer
- Not for structural support



1-1/2" HEAD DIAMETER - EXTENDED GRIP RANGE

Part No.	Drill Size	Overall Length	Grip Range	Pkg. Qty.	Pkg. Wt.
MJX 314	5/16	3-1/4	1 - 2	400	5
MJX 412	5/16	4-1/2	2 - 3-1/4	250	4

1-1/2" HEAD DIAMETER

MJP 234	5/16	2-3/4	1 - 1-1/2	250	3
MJP 512	5/16	5-1/2	3-1/2 - 4	250	5
MJP 614	5/16	6-1/4	4-1/2 - 5	250	5


SUPER SCRUI-IT®

MASONRY ANCHOR SYSTEM

- scalloped thread cuts deep grooves in a wide variety of masonry materials
- Much higher holding power than other thread designs
- Completely stress free - may be installed close to edges
- Works where others fail in difficult substrates (e.g. horizontal mortar joints)
- Available with either straight shank or SDS drill systems
- RUSPRO® coated for maximum corrosion resistance in exposed environments
- SCRUI-IT box with flip-out side for easy access.

SUPER SCRUI-IT® ANCHORS

BLUE RUSPRO® COATED

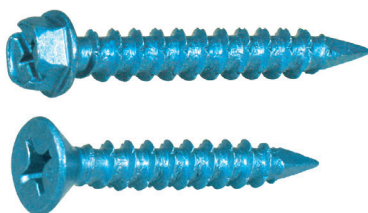

Packaged in boxes of 100 pcs.
1 drill bit included in each box.



HEX WASHER-HEAD		PHILLIPS FLAT-HEAD		
Part No.	Size	Part No.	Case Qty.	Wt.
SCH 31634	3/16 X 3/4	-----	1,000	7
SCH 316114	3/16 X 1-1/4	SCP 316114	1,000	10
SCH 316134	3/16 X 1-3/4	SCP 316134	1,000	12
SCH 316214	3/16 X 2-1/4	SCP 316214	1,000	14
SCH 316234	3/16 X 2-3/4	SCP 316234	1,000	17
SCH 316314	3/16 X 3-1/4	SCP 316314	1,000	20
SCH 3164	3/16 X 4	SCP 3164	1,000	23
SCH 14114	1/4 X 1-1/4	SCP 14114	1,000	14
SCH 14134	1/4 X 1-3/4	SCP 14134	1,000	19
SCH 14214	1/4 X 2-1/4	SCP 14214	1,000	23
SCH 14234	1/4 X 2-3/4	SCP 14234	1,000	27
SCH 14314	1/4 X 3-1/4	SCP 14314	1,000	31
SCH 144	1/4 X 4	SCP 144	1,000	37
SCH 145	1/4 X 5	SCP 145	600	27
SCH 146	1/4 X 6	SCP 146	600	32

SUPER SCRUI-IT® BULK PACKS

Drill bits not included

HEX WASHER-HEAD		PHILLIPS FLAT-HEAD		
Part No.	Size	Part No.	Case Qty.	Wt.
SCH 31634B	3/16 X 3/4	-----	5,000	31
SCH 316114B	3/16 X 1-1/4	SCP 316114B	4,000	36
SCH 316134B	3/16 X 1-3/4	SCP 316134B	3,000	30
SCH 316214B	3/16 X 2-1/4	SCP 316214B	2,000	25
SCH 316234B	3/16 X 2-3/4	SCP 316234B	1,500	23
SCH 316314B	3/16 X 3-1/4	SCP 316314B	800	16
SCH 3164B	3/16 X 4	SCP 3164B	800	18
SCH 14114B	1/4 X 1-1/4	SCP 14114B	2,500	32
SCH 14134B	1/4 X 1-3/4	SCP 14134B	2,000	34
SCH 14214B	1/4 X 2-1/4	SCP 14214B	1,500	33
SCH 14234B	1/4 X 2-3/4	SCP 14234B	1,000	25
SCH 14314B	1/4 X 3-1/4	SCP 14314B	800	24
SCH 144B	1/4 X 4	SCP 144B	700	26
SCH 145B	1/4 X 5	SCP 145B	600	27
-----		SCP 146B	400	21



SUPER SCRUI-IT® SILVER

SILVER RUSPRO® COATED

- Square Socket Drive
- Flat Countersink Head



Packaged in boxes of 100 pcs.
1 drill bit included in each box.



Part No.	Size	Driver Size	Fastens up to	Case Qty.
SCR 316114	3/16 X 1-1/4	#2	1/4"	1,000
SCR 316134	3/16 X 1-3/4	#2	3/4"	1,000
SCR 316214	3/16 X 2-1/4	#2	1-1/4"	1,000
SCR 316234	3/16 X 2-3/4	#2	1-3/4"	1,000
SCR 316314	3/16 X 3-1/4	#2	2-1/4"	1,000
SCR 3164	3/16 X 4	#2	3"	1,000
SCR 14114	1/4 X 1-1/4	#3	1/4"	1,000
SCR 14134	1/4 X 1-3/4	#3	3/4"	1,000
SCR 14214	1/4 X 2-1/4	#3	1-1/4"	1,000
SCR 14234	1/4 X 2-3/4	#3	1-3/4"	1,000
SCR 14314	1/4 X 3-1/4	#3	2-1/4"	1,000

SUPER SCRUI-IT® SILVER BULK PACKS


Drill bits not included

Part No.	Size	Driver Size	Fastens up to	Case Qty.
SCR 316114B	3/16 X 1-1/4	#2	1/4"	4,000
SCR 316134B	3/16 X 1-3/4	#2	3/4"	3,000
SCR 316214B	3/16 X 2-1/4	#2	1-1/4"	2,000
SCR 316234B	3/16 X 2-3/4	#2	1-3/4"	1,500
SCR 316314B	3/16 X 3-1/4	#2	2-1/4"	800
SCR 3164B	3/16 X 4	#2	3"	800
SCR 14114B	1/4 X 1-1/4	#3	1/4"	2,500
SCR 14134B	1/4 X 1-3/4	#3	3/4"	2,000
SCR 14214B	1/4 X 2-1/4	#3	1-1/4"	1,500
SCR 14234B	1/4 X 2-3/4	#3	1-3/4"	1,000
SCR 14314B	1/4 X 3-1/4	#3	2-1/4"	800

SUPER SCRUIT® STAINLESS STEEL

WHITE RUSPRO® COATED

410 STAINLESS STEEL HARDENED RUSPRO® COATED

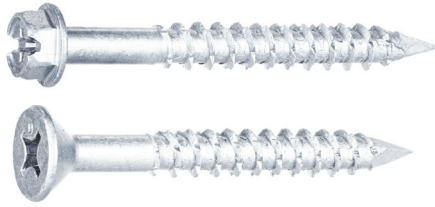

Packaged in boxes of 100 pcs.
1 drill bit included in each box.



HEX WASHER-HEAD

Part No.	Size	Driver Size	Fastens up to	Case Qty.
SSH 316114	3/16 X 1-1/4	MNS14	1/4"	1,000
SSH 316134	3/16 X 1-3/4	MNS14	3/4"	1,000
SSH 316214	3/16 X 2-1/4	MNS14	1-1/4"	1,000
SSH 316234	3/16 X 2-3/4	MNS14	1-3/4"	1,000
SSH 14114	1/4 X 1-1/4	MNS516	1/4"	1,000
SSH 14134	1/4 X 1-3/4	MNS516	3/4"	1,000
SSH 14214	1/4 X 2-1/4	MNS516	1-1/4"	1,000
SSH 14234	1/4 X 2-3/4	MNS516	1-3/4"	1,000
SSH 14314	1/4 X 3-1/4	MNS516	2-1/4"	1,000
SSH 144	1/4 X 4	MNS516	3"	1,000

PHILLIPS FLAT-HEAD

Part No.	Size	Driver Size	Fastens up to	Case Qty.
SSP 316114	3/16 X 1-1/4	MNS14	1/4"	1,000
SSP 316134	3/16 X 1-3/4	MNS14	3/4"	1,000
SSP 316214	3/16 X 2-1/4	MNS14	1-1/4"	1,000
SSP 316234	3/16 X 2-3/4	MNS14	1-3/4"	1,000
SSP 14114	1/4 X 1-1/4	MNS516	1/4"	1,000
SSP 14134	1/4 X 1-3/4	MNS516	3/4"	1,000
SSP 14214	1/4 X 2-1/4	MNS516	1-1/4"	1,000
SSP 14234	1/4 X 2-3/4	MNS516	1-3/4"	1,000
SSP 14314	1/4 X 3-1/4	MNS516	2-1/4"	1,000
SSP 144	1/4 X 4	MNS516	3"	1,000

SDS PLUS CONTRACTOR-PAKS



Manufactured to
ANSI
B 212.15 Standard

Part No.	Diameter		Length (in)		Qty.
	(in)	(mm)	Overall	usable	
SDB 5324	5/32 ANSI	4	4-1/4	2-1/4	25
SDB 5326	5/32 ANSI	4	6-1/4	4-1/4	25
SDB 3164	3/16 ANSI	5	4-1/4	2-1/4	25
SDB 3166	3/16 ANSI	5	6-1/4	4-1/4	25
SDB 3168	3/16 ANSI	5	8-1/4	6-1/4	25

SDS SCRUIT-BITS CONTRACTOR-PAKS

With hex shank for scru-tool sleeve

Part No.	Size	Screw dia.	Max. Fastener Length	Qty.
SCS 5325B	5/32 X 5-1/4	3/16	2-1/4	25
SCS 5327B	5/32 X 7	3/16	4	25
SCS 3165B	3/16 X 5-1/4	1/4	2-1/4	25
SCS 3167B	3/16 X 7	1/4	4	25

SCRUIT® ACCESSORIES

Installation SCRUIT TOOL kit



- Convenient bit storage
- Cuts installation time by 50%
- Stops over-torquing of screw heads

Part No.	Description
SCRUTOOL	SCRUIT Installation tool
SPARE PARTS FOR SCRUIT TOOL	
CDP 1001	Drill adaptor
CDP 1003	Detent spring
CDP 1004	5/32" Ball bearing
CDP 1006	1/4" Driver adaptor
CDP 1007	5/16" Driver adaptor
CDP 1010	Phillips driver adaptor
CDP 1502	Sleeve (5-3/4")
CDP 2006	1/4"-28 Set screw
CDP 2008	1/8" Ball bearing
CDP 2010	1/8" Hex key
PB 21	No. 2 X 1 Phillips bit
PB 31	No. 3 X 1 Phillips bit

SCRUIT-BITS

High performance bits for concrete screw systems



Part No.	Size	Max. Fastener Length	Pkg. Qty.
SCB 5323	5/32 X 3-1/2	1-3/4	10
SCB 5324	5/32 X 4-1/2	2-3/4	10
SCB 5325	5/32 X 5-1/2	4	10
SCB 3163	3/16 X 3-1/2	1-3/4	10
SCB 3164	3/16 X 4-1/2	2-3/4	10
SCB 3165	3/16 X 5-1/2	4	10
SCB 3166	3/16 X 6-1/2	5	10
SCB 3167	3/16 X 7-1/2	6	10

BULK PACKS

Part No.	Size	Max. Fastener Length	Pkg. Qty.
SCB 5323B	5/32 X 3-1/2	1-3/4	100
SCB 5324B	5/32 X 4-1/2	2-3/4	100
SCB 5325B	5/32 X 5-1/2	4	100
SCB 3163B	3/16 X 3-1/2	1-3/4	100
SCB 3164B	3/16 X 4-1/2	2-3/4	100
SCB 3165B	3/16 X 5-1/2	4	100
SCB 3166B	3/16 X 6-1/2	5	100
SCB 3167B	3/16 X 7-1/2	6	100

SDS SCRUIT-BITS

With hex shank for scru-tool sleeve



Part No.	Size	Screw dia.	Max. Fastener Length
SCS 5325	5/32 X 5-1/4	3/16	2-1/4
SCS 5327	5/32 X 7	3/16	4
SCS 3165	3/16 X 5-1/4	1/4	2-1/4
SCS 3167	3/16 X 7	1/4	4

NOTE: For 5" & 6" fasteners use IDS 9 - See page 15

BLUE PLASTIC PLUGS



- Economical plug for light loads in solid substrates

Part No.	Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
UBP 68 *	6-8 X 3/4	3/16	100	7,200	5
UBP 810 *	8-10 X 7/8	3/16	100	7,200	5
UBP 1012 *	10-12 X 1	1/4	100	4,000	6
UBP 1416	14-16 X 1-3/8	5/16	100	1,200	3

Also available in bulk cartons & * Super Pak (See Page 32)

YELLOW PLASTIC PLUGS



- Primarily for solid substrates
- Suitable for light loads in hollow walls

Part No.	Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
UYP 48 *	4-6-8 X 7/8	3/16	100	7,200	7
UYP 812 *	8-10-12 X 1-1/4	1/4	100	4,000	7
UYP 1216	12-14-16 X 1-1/2	5/16	100	1,200	3

Also available in bulk cartons & * Super Pak (See Page 32)

PVC WALL PLUGS



- Can be cut to length for shorter embedment

Part No.	Screw Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
TUR 61	6-8	7/32	100	1,000	2
TUG 101	8-10	1/4	100	1,000	2

UCAN ALEX



- Extra-Grip Aluminum Plugs
- Suitable for electrical fixtures
- High temperature resistance

Part No.	Size	Screw Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
ALE 141	1/4 X 1	6-10	1/4	100	1,000	3
ALE 14114	1/4 X 1-1/4	6-10	1/4	100	1,000	3
ALE 14112	1/4 X 1-1/2	6-10	1/4	100	1,000	4

ZAMAC SCREW ANCHORS



Part No.	Size	Drill Size	Pkg. Qty.	Case Qty.	Case Wt.
LED 634	7-8 X 3/4	1/4	100	1,000	11
LED 61	7-8 X 1	1/4	100	1,000	12
LED 6112	7-8 X 1-1/2	1/4	100	1,000	20
LED 101	10-12 X 1	5/16	100	1,000	20
LED 10112	10-12 X 1-1/2	5/16	100	1,000	28
LED 16112	14-16 X 1-1/2	3/8	100	1,000	40

MUN NYLON PLUGS

Heavy duty push through type



- Made of Nylon 6 for superior performance
- Knock-in collar prevents premature expansion during installation
- Positive guidance keeps screw centered

Part No.	Size	Screw dia.	Drill (mm)	Pkg. Qty.	Case Qty.	Case Wt.
MUN 5	5 X 25	4-6	5	100	3,600	8
MUN 6	6 X 30	6-8	6	100	3,600	10
MUN 8	8 X 40	10-12	8	100	3,600	15
MUN 10	10 X 50	14-18	10	50	1,800	13
MUN 12	12 X 60	3/8	12	25	900	9

METAL HOLLOW WALL ANCHORS

With combination head screws



Best choice for hollow wall

Part No.	Screw Size	Drill Dia.	Grip Range	Pkg. Qty.	Case Qty.	Case Wt.
MWA 18XS	1/8 X 3/4	5/16	0-1/2	100	1,000	10
MWA 18S	1/8 X 1-3/4	5/16	1/8-1/2	100	1,000	14
MWA 18SL	1/8 X 2-1/8	5/16	1/8-5/8	100	1,000	14
MWA 18L	1/8 X 1-3/4	5/16	5/8-7/8	100	1,000	19
MWA 316S	3/16 X 2	7/16	1/8-5/8	50	500	18
MWA 316L	3/16 X 2-1/2	7/16	5/8-1-1/4	50	500	24
MWA 14S	1/4 X 2	1/2	1/8-5/8	50	500	24
MWA 14L	1/4 X 2-1/2	1/2	5/8-1-1/4	50	500	30

DRIVE-TYPE ANCHORS



- Does not require predrilling in drywall

Part No.	Size	Grip Range	Pkg. Qty.	Case Qty.	Case Wt.
MWD 18S	1/8 X 1-1/4	1/8-1/2	100	1,000	15
MWD 18SL	1/8 X 1-3/4	1/8-3/4	100	1,000	15
MWD 18L	1/8 X 1-3/4	5/8-7/8	100	1,000	19

MWA INSTALLATION TOOL

Reduces Installation time by at least 50%




Part No.	Description
MWAT 1	MWA Installation tool

UCAN NYLON TWISTER® II ANCHOR


IMPROVED DESIGN

*Patented

NYLON
TWISTER II
DRYWALL ANCHOR



- Hangs up to: 75 lbs
*All weight bearing tested on a 1/2" thick gypsum board.
- No predrilling is required
- Install with a screwdriver (hand or cordless)
- Fixtures can be installed with #8 screws of any length
- Improved design allows for greater expansion and better holding capability
- Not recommended for over head use



Part No.	Description	Pkg. Qty.	Case Qty.	Case Wt.
TWISTER	TWISTER II NYLON ANCHOR	100	1,000	5.7
TWISTER-B	TWISTER II NYLON ANCHOR	-	2,000	7.8
TWISTER-CS				

* Available in Super Pak Jar (See Page 32)

ZAMAC TWISTER® DRYWALL ANCHOR



Part No.	Description	Pkg. Qty.	Case Qty.	Case Wt.
JET 100 *	Twister zamac anchor	100	1,000	15
JET 100B	Twister zamac anchor	-	2,500	36
JET 100K				

* Available in Super Pak Jar (See Page 32)

TOGGLE BOLTS

Heavy gauge wing and nut



(Socket/slot combination) screws

Part No.	Size	Drill Dia.	Pkg. Qty.	Case Qty.	Case Wt.
TOG 182	1/8 X 2	3/8	50	500	8
TOG 183	1/8 X 3	3/8	50	500	9
TOG 184	1/8 X 4	3/8	50	500	12
TOG 3162	3/16 X 2	9/16	50	500	16
TOG 3163	3/16 X 3	9/16	50	500	18
TOG 3164	3/16 X 4	9/16	50	500	21
TOG 3165	3/16 X 5	9/16	50	300	16
TOG 3166	3/16 X 6	9/16	50	300	18
TOG 143	1/4 X 3	3/4	50	300	21
TOG 144	1/4 X 4	3/4	50	300	24
TOG 145	1/4 X 5	3/4	50	300	27
TOG 146	1/4 X 6	3/4	50	300	29
TOG 384	3/8 X 4	1	25	150	28
TOG 385	3/8 X 5	1	25	100	21
TOG 386	3/8 X 6	1	25	100	24

TOGGLE HEADS ONLY


Heavy gauge wing & nut



Part No.	Size	Drill Dia.	Pkg. Qty.	Case Qty.	Case Wt.
TOG H18	1/8	3/8	100	1,000	8
TOG H316	3/16	9/16	100	1,000	15
TOG H14	1/4	5/8	100	1,000	27
TOG H38	3/8	1	100	400	21

TIP TOGGLE®

- Multi use
- Hollow Cavity Anchor
- Can be used with long length 3/8" rods for extended reach into cavities.



Part No.	Size	Drill Size	Pkg. Qty.	Case Qty.
UTT 384	3/8-16 X 4	7/8"	25	100

NYLON TOGGLE ANCHOR

Use with #8 or #10 screws



Part No.	Size	Drill Dia.	Grip Range	Pkg. Qty.	Case Qty.
NTA 12	1/2	3/8	7/16-9/16	100	1,000
NTA 58	5/8	3/8	9/16-11/16	100	600
NTA 38	3/8	3/8	5/16-7/16	100	-

KAP TOGGLE

Snap-off toggle anchor



Part No.	Screw Size	Drill Size	Pkg. Qty.	Case Qty.
KAP 316	3/16	1/2	100	600
KAP 14	1/4	1/2	100	600

UCAN LV 362 LOW-VELOCITY TOOL



SEMI-AUTOMATIC
For .300 Flat-Head pins
& UD pins

- Uses .27 Cal. Strip Loads - Max power level: Red
- Fasteners up to 2-1/2"

Complete Kit Includes Goggles, Ear Plugs, Cleaning Brushes, Wiper, Lubricant, Spare Parts, Training Manual and Heavy-Duty Carrying Case.

Part No.	Description
LV 362K	Deluxe tool kit complete

FIELD REPLACEMENT PARTS FOR LV 362

36214	Piston assembly for flathead fasteners
301030	Piston for UN-UD fasteners
36215	Piston ring
36217	Base plate
36216	Guide
36238	Shear clip
36212	Stop
36237	Steel ball
36236	Annular spring

UCAN LV 367 LOW-VELOCITY TOOL



SEMI-AUTOMATIC
For .300 Flat-Head pins
& UD pins

- Adjustable Power Dial
- Uses .27 Cal. Strip Loads - Max power level: Red
- Fasteners up to 2-1/2"

Complete Kit Includes Goggles, Ear Plugs, Cleaning Brushes, Wiper, Lubricant, Spare Parts, Training Manual and Heavy-Duty Carrying Case.

Part No.	Description
LV 367K	Deluxe tool kit complete

FIELD REPLACEMENT PARTS FOR LV 367

36714	Piston assembly
36715	Piston ring
36717	Base plate
36716	Guide
36738	Shear clip
36712	Stop
36737	Steel ball
36736	Annular spring

UCAN LV 363i LOW-VELOCITY TOOL



SEMI-AUTOMATIC TOOL
For Insulation Fasteners

- Adjustable Power Dial
- Uses .27 Cal. Strip Loads - Max power level: Red

Complete Kit Includes Goggles, Ear Plugs, Cleaning Brushes, Wiper, Lubricant, Spare Parts, Training Manual and Heavy-Duty Carrying Case.

*Barrel for 6" Fasteners sold separately

Part No.	Description
LV 363iK	Deluxe tool kit complete

FIELD REPLACEMENT PARTS FOR LV 363i

36314	Piston assembly
36315	Piston ring
36352	Stop ring
36353	Retaining ring
36354	Plastic ring
36355	Rubber ring (24mm)
36312	Stop

UCAN LV 470 LOW-VELOCITY TOOL



SEMI-AUTOMATIC
with Adjustable Power
Dial

For PC pins and UTS
studs up to 2-1/2"

- Safe
 - Low Recoil
 - Low Noise Level
 - Adjustable Power Dial
 - Uses .27 Cal. Strip Loads
 - Durable & Reliable
 - Weighs only 7 lbs.
- Max recommended power level: Red

Complete Kit Includes Plastic Case, Goggles, Lubricant, 1-1/4" Steel Brush, Wood Brush, 5 Stop Rings, 3 Retaining Rings, Rod, Cleaning Cloth, Training Manual.

Part No.	Description
LV 470K	Deluxe tool kit complete

FIELD REPLACEMENT PARTS FOR LV 470

C-05	Stop ring
C-06	Retaining ring, fastener guide
C-07	Piston for pins
C-07A	Piston for threaded studs
C-08	Piston ring
C-09	Piston guide
C-11	Retaining ring, piston guide

POWER LOADS

.22 CAL. TYPE A FOR LV 151

For low-velocity tools



Part No.	Power Level	Pkg. Qty.	Case Qty.	Case Wt.
CA2 BRO	Brown 2 Med.-Light	100	10,000	20
CA3 GRE	Green 3 Med.-Strong	100	10,000	20
CA4 YEL	Yellow 4 - Strong	100	10,000	20

.25 CAL. IN PLASTIC STRIPS

For low-velocity tools



Part No.	Power Level	Pkg. Qty.	Case Qty.	Case Wt.
CTS YEL	Yellow - Medium	100	10,000	29
CTS RED	Red - Strong	100	10,000	29

.27 CAL. IN PLASTIC STRIPS

For UCAN LV362/367. Also for DX351 and DX36.

CHS G	Green - Light	100	10,000	32
CHS Y	Yellow - Medium	100	10,000	32
CHS R	Red - Strong	100	10,000	32

FOR UCAN LV470 AND FOR DX450

CHS R	Red - Strong	100	10,000	32
CHS P	Purple - Extra strong	100	10,000	32

ACCESSORIES FOR LV TOOLS



New sizes in red

Part No.	Description
LVCK	Cleaning kit, (brushes, wiper, lub. spray)
LVBR1	1-3/8 Round brush
LVBR2	3/4 Round brush
LVBR3	Flat brush
LVBR4	7/16 Cleaning brush
LVSPR	PAT Tool spray lube 3FL.oz (85gms)
LVSAFE	Safety goggles
LVCASE-360	Carrying case only - for LV 362 & LV 367
LVCASE-470	Carrying case only

.300 FLAT-HEADED FASTENERS

Super point




Fluted guide washers for steel and concrete

Part No.	Shank Length	Pkg. Qty.	Case Qty.	Case Wt.
AFH 13K	1/2 Knurled	100	1,000	5
AFH 16K	5/8 Knurled	100	1,000	6
AFH 19	3/4	100	1,000	6
AFH 25	1	100	1,000	7
AFH 32	1-1/4	100	1,000	8
AFH 37	1-1/2	100	1,000	9
AFH 47	1-7/8	100	1,000	12
AFH 57	2-1/4	100	1,000	14
AFH 62	2-1/2	100	1,000	15
AFH 72	2-7/8	100	1,000	17

25MM STEEL WASHER FASTENERS

Super point




Part No.	Shank Length	Pkg. Qty.	Case Qty.	Case Wt.
AWI 25	1"	100	1,000	20
AWI 32	1-1/4"	100	1,000	21
AWI 37	1-1/2"	100	1,000	25
AWI 50	2"	100	1,000	35
AWI 62	2-1/2"	100	600	16
AWI 75	3"	100	600	19

BULK PACKS

Part No.	Shank Length	Case Qty.	Case Wt.
AWI 37M	1-1/2"	1000	25

INSULATION PIN

Assembled with 36mm washer



Part No.	Shank Length	Pkg. Qty.	Case Qty.	Case Wt.
AWP 37	1-1/4"	100	600	13
AWP 47	1-7/8"	100	600	9
AWP 62	2-1/2"	100	600	10

8 mm HEADED FASTENERS

Super point with 8 mm nylon washer



For UCAN LV 362*, also for DX 350 & DX 36.

Part No.	Shank Length	Pkg. Qty.	Case Qty.	Case Wt.
UD 19	3/4	100	1,000	6
UD 22	7/8	100	1,000	6
UD 27	1-1/8	100	1,000	7
UD 32	1-1/4	100	1,000	8
UD 37	1-1/2	100	1,000	9
UD 47	1-7/8	100	1,000	11
UD 57	2-1/4	100	1,000	13
UD 62	2-1/2	100	1,000	15
UD 72	2-7/8	100	1,000	16

KNURLED FOR STEEL

UD 16K	5/8	100	1,000	5
--------	-----	-----	-------	---

* Piston 301030 required when UD pins are used in LV 362 tool.

COLLATED PINS - 10 PIN MAGAZINE

With super point for magazine type PA tools



Part No.	Shank Length	Pkg. Qty.	Case Qty.	Case Wt.
UD 16KS	5/8	100	1,000	6
UD 19S	3/4	100	1,000	6
UD 22S	7/8	100	1,000	7
UD 27S	1-1/8	100	1,000	8
UD 32S	1-1/4	100	1,000	9
UD 37S	1-1/2	100	1,000	10
UD 47S	1-7/8	100	1,000	12
UD 57S	2-1/4	100	1,000	14
UD 62S	2-1/2	100	1,000	15
UD 72S	2-7/8	100	1,000	17


"TOP HAT" FASTENER



Part No.	Length	Pkg. Qty.	Case Qty.	Case Wt.
FTH 19	3/4	100	1,000	7

* Piston 301030 required when FTH pins are used in LV 362 tool.

PLASTIC INSULATION FASTENER WITH PIN



NEW!

Part No.	Installation Thickness	Box Qty.	Case Qty.	Case Wt.
PIF 112B	1-1/2"	100	1000	27.2
PIF 2B	2"	100	1000	26.55
PIF 212B	2-1/2"	100	1000	27.90
PIF 3B	3"	100	1000	29.55
PIF 4B	4"	100	800	27.10
PIF 5B	5"	100	500	19.80
PIF 6B	6"	100	500	21.45

*Barrel for 6" Fasteners sold separately

.300 FLAT-HEADED ANGLE CLIP ASSEMBLY



Part No.	Length	Pkg. Qty.	Case Qty.	Case Wt.
ACC 32	1-1/4	100	600	42

.300 FLAT-HEADED CONDUIT CLIP ASSEMBLY



Part No.	Conduit Size	Pkg. Qty.	Case Qty.	Case Wt.
FCC 38	3/8"	100	600	32
FCC 12	1/2"	100	600	27
FCC 34	3/4"	100	600	32

6 mm HEADED FASTENERS

Super point with 12 mm steel washer



For UCAN LV 470, also for DX 400 & DX 450 tools.

Part No.	Shank Length	Pkg. Qty.	Case Qty.	Case Wt.
PC 22	7/8	100	1,000	7
PC 27	1-1/8	100	1,000	8
PC 32	1-1/4	100	1,000	9
PC 37	1-1/2	100	1,000	11
PC 42	1-5/8	100	1,000	11
PC 47	1-7/8	100	1,000	13
PC 57	2-1/4	100	1,000	15
PC 62	2-1/2	100	1,000	16
PC 72	2-7/8	100	1,000	18

KNURLED FOR STEEL

PC 16K	5/8	100	1,000	6
PC 19K	3/4	100	1,000	7

1/4"-20 THREADED STUDS

With 12 mm plastic guide washer

For LV 470, (use C-07A piston)



Part No.	Thread Length	Shank Length	Pkg. Qty.	Case Qty.	Case Wt.
UTS 1032K	3/4	7/16 Knurled	100	1,000	10

SCREWDRIVER INSERT BITS



PHILLIPS BITS

Part No.	Description	Standard Pack
PB11	No. 1 X 1 Phillips bit	25
PB21	No. 2 X 1 Phillips bit	25
PB31	No. 3 X 1 Phillips bit	25
PB12	No. 1 X 2 Phillips bit	25
PB22	No. 2 X 2 Phillips bit	25
PB32	No. 3 X 2 Phillips bit	25
PB13	No. 1 X 3 Phillips bit	25
PB23	No. 2 X 3 Phillips bit	25
PB33	No. 3 X 3 Phillips bit	25
PB14	No. 1 X 4 Phillips bit	25
PB24	No. 2 X 4 Phillips bit	25
PB34	No. 3 X 4 Phillips bit	25
PB16	No. 1 X 6 Phillips bit	1
PB26	No. 2 X 6 Phillips bit	1
PB36	No. 3 X 6 Phillips bit	1


DRYWALL BITS - REDUCED SHANK



PR21	No. 2 X 1 Phillips bit - Reduced shank	25
PR22	No. 2 X 2 Phillips bit - Reduced shank	25

SQUARE RECESS BITS - 2 PIECE HEX SHANK

- Colour coded



RS11	No. 1 X 1 Square recess bit	25
RS21	No. 2 X 1 Square recess bit	25
RS31	No. 3 X 1 Square recess bit	25
RS12	No. 1 X 2 Square recess bit	25
RS22	No. 2 X 2 Square recess bit	25
RS32	No. 3 X 2 Square recess bit	25
RS13	No. 1 X 3 Square recess bit	25
RS23	No. 2 X 3 Square recess bit	25
RS33	No. 3 X 3 Square recess bit	25
RS14	No. 1 X 4 Square recess bit	25
RS24	No. 2 X 4 Square recess bit	25
RS34	No. 3 X 4 Square recess bit	25
RS16	No. 1 X 6 Square recess bit	1
RS26	No. 2 X 6 Square recess bit	1
RS36	No. 3 X 6 Square recess bit	1

SQUARE RECESS BITS - ONE PIECE ROUND SHANK



RB01	No. 0 X 1 Square recess bit	25
RB21	No. 2 X 1 Square recess bit	25
RB31	No. 3 X 1 Square recess bit	25
RB02	No. 0 X 2 Square recess bit	25
RB12	No. 1 X 2 Square recess bit	25
RB22	No. 2 X 2 Square recess bit	25
RB32	No. 3 X 2 Square recess bit	25
RB13	No. 1 X 3 Square recess bit	25
RB23	No. 2 X 3 Square recess bit	25
RB33	No. 3 X 3 Square recess bit	25
RB24	No. 2 X 4 Square recess bit	25
RB34	No. 3 X 4 Square recess bit	25
RB16	No. 1 X 6 Square recess bit	1
RB26	No. 2 X 6 Square recess bit	1
RB36	No. 3 X 6 Square recess bit	1

SLOTTED BITS



SL22	7/32 X 2 Slotted bit	25
------	----------------------	----

SPRING NUT SETTERS

- Ideal for Stainless Steel fasteners
- Prevents build up of steel shards



Part No.	Description	Standard Pack
SNS 14	1/4 X 2-1/2 Spring nut setter	10
SNS 516	5/16 X 2-1/2 Spring nut setter	10
SNS 38	3/8 X 2-1/2 Spring nut setter	10

MAGNETIC NUT SETTERS



MAGNETIC NUT SETTERS - SHORT

Part No.	Description	Standard Pack
MNS 14S	1/4 X 1-11/16 Mag nut setter	10
MNS 516S	5/16 X 1-11/16 Mag nut setter	10
MNS 38S	3/8 X 1-3/4 Mag nut setter	10
MNS 716S	7/16 X 1-3/4 Mag nut setter	10
MNS 14	1/4 X 2-1/2 Mag nut setter	10
MNS 516	5/16 X 2-1/2 Mag nut setter	10
MNS 38	3/8 X 2-1/2 Mag nut setter	10
MNS 716	7/16 X 2-1/2 Mag nut setter	10
MNS 12	1/2 X 2-1/2 Mag nut setter	10

MAGNETIC NUT SETTERS - LONG



Part No.	Description
MNS 14L	1/4 X 6 Mag nut setter
MNS 516L	5/16 X 6 Mag nut setter
MNS 38L	3/8 X 6 Mag nut setter
MNS 14XL	1/4 X 12 Mag nut setter
MNS 516XL	5/16 X 12 Mag nut setter
MNS 38XL	3/8 X 12 Mag nut setter

INSERT BIT HOLDERS

MAGNETIC BIT HOLDERS

Stainless Steel



Part No.	Description	Standard Pack
MBH 3	1/4 X 3 Magnetic bit holder bit	10

QUICK CHANGE BIT HOLDER



Part No.	Description	Standard Pack
MBH 25Q	1/4 X 2-1/2 Quick change magnetic bit holder	10

U-DRILLS®

U-DRILLS® BULK CASES SELF DRILLING METAL SCREWS

- U-DRILLS® Self Drilling Screws are made to the highest industry quality standards for outstanding performance.
- All screws are available painted head or ruspro coated to order.

SOCKET PAN HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TSP 638B	6-20 X 3/8	2	.090/13 ga	15,000	28
TSP 612B *	6-20 X 1/2	2	.090/13 ga	15,000	33
TSP 812B *	8-18 X 1/2	2	.100/12 ga	15,000	47
TSP 858B *	8-18 X 5/8	2	.100/12 ga	10,000	38
TSP 834B *	8-18 X 3/4	2	.100/12 ga	10,000	42
TSP 834BW	8-18 X 3/4 white hd 2	2	.100/12 ga	10,000	42
TSP 81B *	8-18 X 1	2	.100/12 ga	7,500	37
TSP 8112B *	8-18 X 1-1/2	2	.100/12 ga	6,000	44
TSP 82B	8-18 X 2	2	.100/12 ga	3,000	27
TSP 1012B *	10-16 X 1/2	2	.110/12 ga	10,000	45
TSP 1058B *	10-16 X 5/8	3	.175/7 ga	8,000	40
TSP 1034B *	10-16 X 3/4	3	.175/7 ga	8,000	45
TSP 101B *	10-16 X 1	3	.175/7 ga	5,000	35
TSP 10114B *	10-16 X 1-1/4	3	.175/7 ga	4,000	33
TSP 10112B *	10-16 X 1-1/2	3	.175/7 ga	4,000	39
TSP 1234B	12-14 X 3/4	3	.210/5 ga	6,000	48

* Available in Super Pak Jar (See Page 31)

RUSPRO® COATED

TRP 834B	8-18 X 3/4	2	.100/12 ga	10,000	42
TRP 1034B	10-16 X 3/4	3	.175/7 ga	8,000	45
TRP 101B	10-16 X 1	3	.175/7 ga	5,000	35
TRP 10112B	10-16 X 1-1/2	3	.175/7 ga	4,000	39
TRP 121B	12-14 X 1	3	.210/5 ga	5,000	47
TRP 12112B	12-14 X 1-1/2	3	.210/5 ga	3,000	39

PHILLIPS PAN HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TPP 812B	8-18 X 1/2	2	.100/12 ga	15,000	46
TPP 834B	8-18 X 3/4	2	.100/12 ga	10,000	42
TPP 81B	8-18 X 1	2	.100/12 ga	7,500	39
TPP 8112B	8-18 X 1-1/2	2	.100/12 ga	6,000	43
TPP 1012B	10-16 X 1/2	2	.110/12 ga	10,000	46
TPP 1034B	10-16 X 3/4	3	.175/7 ga	8,000	46
TPP 101B	10-16 X 1	3	.175/7 ga	5,000	33

PHILLIPS MODIFIED TRUSS HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TPW 812B *	8-18 X 1/2	2	.100/12 ga	10,000	40
TPW 8114B	8-18 X 1-1/4	2	.100/12 ga	5,000	32
TPW 1034B	10-16 X 3/4	3	.175/7 ga	8,000	46

* Available in Super Pak Jar (See Page 31)

HEX WASHER HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
THW 812B *	8-18 X 1/2	2	.100/12 ga	10,000	32
THW 812BW	8-18 X 1/2 white hd	2	.100/12 ga	10,000	34
THW 858B *	8-18 X 5/8	2	.100/12 ga	10,000	38
THW 834B *	8-18 X 3/4	2	.100/12 ga	10,000	43
THW 81B *	8-18 X 1	2	.100/12 ga	8,000	43
THW 8112B *	8-18 X 1-1/2	2	.100/12 ga	6,000	43
THW 1012B *	10-16 X 1/2	2	.110/12 ga	10,000	48
THW 1058B *	10-16 X 5/8	3	.175/7 ga	8,000	42
THW 1034B *	10-16 X 3/4	3	.175/7 ga	8,000	46
THW 1034BH	10-16 X 3/4high hd	3	.175/7 ga	8,000	46
THW 1034BW	10-16 X 3/4white hd	3	.175/7 ga	8,000	46
THW 101B *	10-16 X 1	3	.175/7 ga	5,000	36
THW 10114B *	10-16 X 1-1/4	3	.175/7 ga	4,000	35
THW 10112B *	10-16 X 1-1/2	3	.175/7 ga	3,000	31
THW 102B	10-16 X 2	3	.175/7 ga	2,000	25
THW 10212B	10-16 X 2-1/2	3	.175/7 ga	1,500	22
THW 103B	10-16 X 3	3	.175/7 ga	1,000	17
THW 1234B *	12-14 X 3/4	3	.210/5 ga	6,000	47
THW 121B *	12-14 X 1	3	.210/5 ga	5,000	46
THW 121BVW	12-14 X 1white	3	.210/5 ga	5,000	46
THW 121BB	12-14 X 1black	3	.210/5 ga	5,000	46
THW 12114B	12-14 X 1-1/4	3	.210/5 ga	4,000	44
THW 12112B *	12-14 X 1-1/2	3	.210/5 ga	3,000	40
THW 122B *	12-14 X 2	3	.210/5 ga	2,000	33
THW 12212B	12-14 X 2-1/2	3	.210/5 ga	1,500	30
THW 1434B *	1/4-14 X 3/4	3	.220/4 ga	4,000	48
THW 141B *	1/4-14 X 1	3	.220/4 ga	3,000	45
THW 141BB	1/4-14 X 1 black	3	.220/4 ga	3,000	45
THW 141BVW	1/4-14 X 1white hd	3	.220/4 ga	3,000	45
THW 141BT	1/4-14 X 1tan hd	3	.220/4 ga	3,000	45
THW 14114B *	1/4-14 X 1-1/4	3	.220/4 ga	2,000	34
THW 14114BY	1/4-14 X 1-1/4 yellow zinc	3	.220/4 ga	2,000	34
THW 14112B *	1/4-14 X 1-1/2	3	.220/4 ga	2,000	38
THW 142B	1/4-14 X 2	3	.220/4 ga	1,500	36
THW 14212B	1/4-14 X 2-1/2	3	.220/4 ga	1,000	28
THW 143B	1/4-14 X 3	3	.220/4 ga	1,000	34
THW 144B	1/4-14 X 4	3	.220/4 ga	500	19
THW 146B	1/4-14 X 6	3	.220/4 ga	500	31

* Available in Super Pak Jar (See Page 31)

RUSPRO® COATED

TRH 812B	8-18 X 1/2	2	.100/12ga	10,000	32
TRH 812BW	8-18 X 1/2	2	.100/12ga	10,000	32
TRH 1034B	10-16 X 3/4	3	.175/7 ga	8,000	46
TRH 10112B	10-16 X 1-1/2	3	.175/7 ga	3,000	31
TRH 1234B	12-14 X 3/4	3	.210/5 ga	6,000	47
TRH 121B	12-14 X 1	3	.210/5 ga	5,000	46
TRH 12114B	12-14 X 1-1/4	3	.210/5 ga	4,000	46
TRH 12112B	12-14 X 1-1/2	3	.210/5 ga	3,000	40
TRH 122B	12-14 X 2	3	.210/5 ga	2,000	33
TRH 141B	1/4-14 X 1	3	.220/4 ga	3,000	42
TRH 14201B	1/4-20 X 1	3	.220/4 ga	3,000	47
TRH 14114B	1/4-14 X 1-1/4	3	.220/4 ga	2,000	34
TRH 14112B	1/4-14 X 1-1/2	3	.220/4 ga	2,000	38
TRH 142B	1/4-14 X 2	3	.220/4 ga	1,500	36
TRH 143B	1/4-14 X 3	3	.220/4 ga	1,000	34

HEX WASHER HEAD

Zinc Plated



* w/EPDM washer

Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
THW 1034BN	10-16 X 3/4	3	.175/7 ga	3,000	26
THW 1234BN	12-14 X 3/4	3	.210/5 ga	3,000	32
THW 121BN	12-14 X 1	3	.210/5 ga	3,000	37
THW 12114BN	12-14 X 1-1/4	3	.210/5 ga	2,000	28
THW 12112BN	12-14 X 1-1/2	3	.210/5 ga	2,000	31
THW 122BN	12-14 X 2	3	.210/5 ga	2,000	36
THW 1434BN	1/4-14 X 3/4	3	.220/4 ga	3,000	46
THW 141BN	1/4-14 X 1	3	.220/4 ga	2,000	42
THW 14114BN	1/4-14 X 1-1/4	3	.220/4 ga	2,000	40
THW 14112BN	1/4-14 X 1-1/2	3	.220/4 ga	1,000	23
THW 142BN	1/4-14 X 2	3	.220/4 ga	1,000	28
THW 143BN	1/4-14 X 3	3	.220/4 ga	1,000	37
THW 144BN	1/4-14 X 4	3	.220/4 ga	500	23

RUSPRO® COATED SCREWS



* w/EPDM washer


TRH 1034BN	10-16 X 3/4	3	.175/7 ga	3,000	26
TRH 1234BN	12-14 X 3/4	3	.210/5 ga	3,000	32
TRH 121BN	12-14 X 1	3	.210/5 ga	3,000	37
TRH 12114BN	12-14 X 1-1/4	3	.210/5 ga	2,000	28
TRH 12112BN	12-14 X 1-1/2	3	.210/5 ga	2,000	31
TRH 141BN	1/4-14 X 1	3	.220/4 ga	2,000	42
TRH 14114BN	1/4-14 X 1-1/4	3	.220/4 ga	2,000	40
TRH 14112BN	1/4-14 X 1-1/2	3	.220/4 ga	1,000	23
TRH 142BN	1/4-14 X 2	3	.220/4 ga	1,000	28
TRH 143BN	1/4-14 X 3	3	.210/5 ga	1,000	37

Automated washer assembly available for most sizes not listed. See page 27

WOOD TO METAL APPLICATIONS


SOCKET WAFER HEAD WITHOUT REAMER

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TSW 101634B	10-16 X 3/4	3	.175/7 ga	8,000	45
TSW 1034B *	10-24 X 3/4	3	.175/7 ga	8,000	45
TSW 101B *	10-24 X 1	3	.175/7 ga	5,000	36
TSW 10114B *	10-24 X 1-1/4	3	.175/7 ga	3,000	26
TSW 10112B	10-24 X 1-1/2	3	.175/7 ga	3,000	31
TSW 122B	12-24 X 2	3	.210/5 ga	1,500	29
TSW 12212B	12-24 X 2-1/2	3	.210/5 ga	1,000	24
TSW 123B	12-24 X 3	3	.210/5 ga	1,000	22
TSW 124B	12-24 X 4	3	.210/5 ga	800	27
TSW 14112B	1/4-20 X 1-1/2	3	.210/5 ga	2,000	37
TSW 14212B	1/4-20 X 2-1/2	3	.210/5 ga	1,000	29
TSW 143B	1/4-20 X 3	3	.210/5 ga	1,000	34

SOCKET WAFER HEAD WITH REAMER



TSW 10112RB *	10-24 X 1-1/2	3	.175/7 ga	3,000	30
TSW 122RB *	12-24 X 2	4	.312/5/16"	1,500	28
TSW 12212RB *	12-24 X 2-1/2	4	.312/5/16"	1,000	23
TSW 123RB *	12-24 X 3	4	.312/5/16"	1,000	27
TSW 124RB	12-24 X 4	4	.312/5/16"	800	28

* Available in Super Pak Jar (See Page 31)

HEAVY GAUGE APPLICATIONS

HEX WASHER HEAD

RUSPRO® Coated



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TRH 1278B4 *	12-24 X 7/8	4	.312/ 5/16"	5,000	44
TRH 12114B5 *	12-24 X 1-1/4	5	.500/ 1/2"	4,000	43
TRH 12112B5 *	12-24 X 1-1/2	5	.500/ 1/2"	3,000	39
TRH 122B5 *	12-24 X 2	5	.500/ 1/2"	1,500	25
TRH 143B5	1/4-28 X 3	5	.500/ 1/2"	1,000	37
TRH 144B5	1/4-28 X 4	5	.500/ 1/2"	500	24
TRH 145B5	1/4-28 X 5	5	.500/ 1/2"	500	30
TRH 146B5	1/4-28 X 6	5	.500/ 1/2"	500	36
TRH 147B5	1/4-28 X 7	5	.500/ 1/2"	400	36
TRH 148B5	1/4-28 X 8	5	.500/ 1/2"	400	35
TRH 1410B5	1/4-28 X 10	5	.500/ 1/2"	200	19

* Available in Super Pak Jar (See Page 31)

RUSPRO® COATED SCREWS



* w/EPDM washer

TRH 1278B4N	12-24 X 7/8	4	.312/ 5/16"	3,500	40
TRH 12114B5N	12-24 X 1-1/4	5	.500/ 1/2"	3,000	40
TRH 12112B5N	12-24 X 1-1/2	5	.500/ 1/2"	2,000	31
TRH 122B5N	12-24 X 2	5	.500/ 1/2"	1,500	29
TRH 143B5N	1/4-28 X 3	5	.500/ 1/2"	1,000	37
TRH 144B5N	1/4-28 X 4	5	.500/ 1/2"	500	26
TRH 145B5N	1/4-28 X 5	5	.500/ 1/2"	500	32
TRH 146B5N	1/4-28 X 6	5	.500/ 1/2"	500	36
TRH 148B5N	1/4-28 X 8	5	.500/ 1/2"	400	36

HEX WASHER HEAD - UP TO 19MM DRILL CAPACITY

RUSPRO® Coated

MIGHTY MOLE®



#8 POINT DRILLS UP TO 3/4" STEEL

Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TRH 12114MB5	12-24 X 1-1/4	5	0.500	4,000	48
TRH 12112MB5	12-24 X 1-1/2	5	0.500	3,000	43
TRH 122MB5	12-24 X 2	5	0.500	1,500	29
TRH 143MB5	1/4-20 X 3	5	0.500	1,000	37
TRH 144MB5	1/4-20 X 4	5	0.500	500	22
TRH 146MB5	1/4-20 X 6	5	0.500	500	32
TRH 143MB8	1/4-20 X 3-1/8	8	0.750	1,000	37
TRH 144MB8	1/4-20 X 4	8	0.750	500	24

STITCH LAPPING SCREW

Zinc Plated



* w/EPDM washer

Part No.	Description	AF	Point	Case Qty.	Case Wt.
SHW 1478B	1/4-14 X 7/8 HWH	5/16"	I	3,500	39
SHWN 1478B	1/4-14 X 7/8 w/ EPDM washer	5/16"	I	2,500	37
SHW 1478LB	1/4-14 X 7/8 HWH	3/8"	I	3,500	39
SHWN 1478LB	1/4-14 X 7/8 w/ EPDM washer	3/8"	I	2,500	41

U-DRILLS® 100 PACKS

SOCKET PAN HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Pkg. Qty.	Case Qty.	Case Wt.
TSP 612	6-20 X 1/2	2	.090/13 ga	100	1,000	3
TSP 812	8-18 X 1/2	2	.100/12 ga	100	1,000	5
TSP 858	8-18 X 5/8	2	.100/12 ga	100	1,000	5
TSP 834	8-18 X 3/4	2	.100/12 ga	100	1,000	5
TSP 81	8-18 X 1	2	.100/12 ga	100	1,000	6
TSP 1012	10-16 X 1/2	2	.110/12 ga	100	1,000	5
TSP 1034	10-16 X 3/4	3	.175/7 ga	100	1,000	7
TSP 101	10-16 X 1	3	.175/7 ga	100	1,000	7

HEX WASHER HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Pkg. Qty.	Case Qty.	Case Wt.
THW 812	8-18 X 1/2	2	.100/12 ga	100	1,000	5
THW 858	8-18 X 5/8	2	.100/12 ga	100	1,000	5
THW 834	8-18 X 3/4	2	.100/12 ga	100	1,000	5
THW 81	8-18 X 1	2	.100/12 ga	100	1,000	6
THW 1012	10-16 X 1/2	2	.110/12 ga	100	1,000	6
THW 10112	10-16 X 1-1/2	3	.175/7 ga	100	1,000	10
THW 1034	10-16 X 3/4	3	.175/7 ga	100	1,000	7
THW 101	10-16 X 1	3	.175/7 ga	100	1,000	8
THW 1234	12-14 X 3/4	3	.210/5 ga	100	1,000	9
THW 121	12-14 X 1	3	.210/5 ga	100	1,000	11
THW 12112	12-14 X 1-1/2	3	.210/5 ga	100	1,000	14
THW 1434	1/4-14 X 3/4	3	.220/4 ga	100	1,000	13
THW 141	1/4-14 X 1	3	.220/4 ga	100	1,000	15
THW 14112	1/4-14 X 1-1/2	3	.220/4 ga	100	1,000	19

SOCKET WAFER HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Pkg. Qty.	Case Qty.	Case Wt.
TSW 1034	10-24 X 3/4	3	.175/7 ga	100	1,000	7
TSW 101	10-24 X 1	3	.175/7 ga	100	1,000	7
TSW 10114	10-24 X 1-1/4	3	.175/7 ga	100	1,000	9
TSW 10112	10-24 X 1-1/2	3	.175/7 ga	100	1,000	10
TSW 122	12-24 X 2	3	.210/5 ga	100	1,000	18
TSW 10112R	10-24 X 1-1/2	3	.175/7 ga	100	1,000	11
TSW 122R	12-24 X 2	4	.312/5/16"	100	1,000	18
TSW 12212R	12-24 X 2-1/2	4	.312/5/16"	100	1,000	19
TSW 123R	12-24 X 3	4	.312/5/16"	100	1,000	26

BONDED EPDM SEALING WASHERS

3 Types to suit most applications



TYPE I

recommended for use with zinc plated screws.

Part No.	Screw Size	Washer Dia.	Pkg Qty.	Case Qty.
SW 10	8-10	12	500	5,000
SW 1012	10-12	14	500	5,000
SW 14	14	16	500	5,000
SW 10B	8-10	12	—	22,000
SW 1012B	10-12	14	—	15,000
SW 14B	14	16	—	12,000
SW 1478B	14	22	—	5,000
SW 141B	14	25	—	5,000

TYPE II

- 1000 hours salt spray For superior corrosion protection.
- Recommended for use with RUSPRO® coated screws.

Part No.	Screw Size	Washer Dia.	Pkg Qty.	Case Qty.
CW 10	8-10	12	500	5,000
CW 1012	10-12	14	500	5,000
CW 14	14	16	500	5,000
CW 10B	8-10	12	—	22,000
CW 1012B	10-12	14	—	15,000
CW 14B	14	16	—	12,000

TYPE III

- Recommended for use with stainless steel screws.

Part No.	Screw Size	Washer Dia.	Pkg Qty.	Case Qty.
SW 10SS	8-10	12	500	5,000
SW 1012SS	10-12	14	500	5,000
SW 14SS	14	16	500	5,000
SW 8BSS	8	8	—	33,000
SW 10BSS	8-10	12	—	22,000
SW 1012BSS	10-12	14	—	15,000
SW 14BSS	14	16	—	12,000



UCAN offers automated assembly of many types of screws with bonded EPDM or neoprene washers. Please call for a quote. Capacity: Screw diameter # 8 – 14 Length 3/4" – 2-7/8"



U-DRILLS® STAINLESS STEEL - BULK CASES

All UCAN grade 410 hardened stainless steel fasteners are RUSPRO® coated to prevent discolouring due to exposure. RUSPRO® coating provides excellent resistance to atmospheric corrosion and road salt. (See specification on page 34)

HEX WASHER HEAD

410 STAINLESS STEEL HARDENED RUSPRO® COATED



New size in red

Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TRH 812BSS *	8-18 X 1/2	2	.100/12 ga	10,000	34
TRH 1034BSS *	10-16 X 3/4	3	.175/7 ga	8,000	50
TRH 1234BSS *	12-14 X 3/4	3	.210/5 ga	6,000	47
TRH 121BSS *	12-14 X 1	3	.210/5 ga	5,000	43
TRH 12112BSS	12-14 X 1-1/2	3	.210/5 ga	3,000	40
TRH 122BSS	12-14 X 2	3	.210/5 ga	2,000	33
TRH 1434BSS *	1/4-14 X 3/4	3	.220/4 ga	4,000	48
TRH 141BSS *	1/4-14 X 1	3	.220/4 ga	3,000	45
TRH 14114BSS	1/4-14 X 1-1/4	3	.220/4 ga	2,000	34
TRH 14112BSS	1/4-14 X 1-1/2	3	.220/4 ga	2,000	38
TRH 142BSS	1/4-14 X 2	3	.220/4 ga	1,500	36
TRH 143BSS	1/4-14 X 3	3	.220/4 ga	1,000	38
TRH 14312BSS	1/4-14 X 3-1/2	3	.220/4 ga	800	31
TRH 144BSS	1/4-14 X 4	3	.220/4 ga	500	21

* Available in Super Pak Jar (See Page 31)

410 STAINLESS STEEL HARDENED RUSPRO® COATED



* w/EPDM washer

Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TRH 1234BSSN	12-14 X 3/4	3	.210/5 ga	3,000	32
TRH 121BSSN	12-14 X 1	3	.210/5 ga	3,000	37
TRH 12112BSSN	12-14 X 1-1/2	3	.210/5 ga	2,000	31
TRH 141BSSN	1/4-14 X 1	3	.220/4 ga	2,000	42
TRH 14114BSSN	1/4-14 X 1-1/4	3	.220/4 ga	2,000	40
TRH 14112BSSN	1/4-14 X 1-1/2	3	.220/4 ga	1,000	23
TRH 142BSSN	1/4-14 X 2	3	.220/4 ga	1,000	28
TRH 143BSSN	1/4-14 X 3	3	.210/5 ga	1,000	38
TRH 14312BSSN	1/4-14 X 3-1/2	3	.210/5 ga	800	33
TRH 144BSSN	1/4-14 X 4	3	.210/5 ga	500	22

PHILLIPS MODIFIED TRUSS HEAD

410 STAINLESS STEEL HARDENED RUSPRO® COATED



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TRW 812BSS *	8-18 X 1/2	2	.100/12 ga	10,000	32

* Available in Super Pak Jar (See Page 31)

SQUARE SOCKET PAN HEAD

410 STAINLESS STEEL HARDENED RUSPRO® COATED



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TRP 612BSS	6-20 X 1/2	2	.090/13 ga	15,000	28
TRP 812BSS *	8-18 X 1/2	2	.100/12 ga	15,000	48
TRP 834BSS	8-18 X 3/4	2	.100/12 ga	10,000	42
TRP 81BSS	8-18 X 1	2	.100/12 ga	7,500	37
TRP 8114BSS	8-18 X 1-1/4	2	.100/12 ga	6,000	40
TRP 8112BSS	8-18 X 1-1/2	2	.100/12 ga	6,000	44
TRP 1034BSS *	10-16 X 3/4	3	.175/7 ga	8,000	47
TRP 101BSS	10-16 X 1	3	.175/7 ga	5,000	35
TRP 10114BSS	10-16 X 1-1/4	3	.175/7 ga	4,000	33
TRP 10112BSS	10-16 X 1-1/2	3	.175/7 ga	4,000	39
TRP 102BSS	10-16 X 2	3	.175/7 ga	2,000	24
TRP 121BSS	12-14 X 1	3	.210/5 ga	5,000	47

* Available in Super Pak Jar (See Page 31)

FLAT COUNTERSUNK HEAD

410 STAINLESS STEEL HARDENED RUSPRO® COATED

Square Socket Drive



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TRF 1034BSS	10-16 X 3/4	3	.175/7 ga	8,000	47
TRF 101BSS	10-16 X 1	3	.175/7 ga	5,000	35
TRF 10114BSS	10-16 X 1-1/4	3	.175/7 ga	4,000	33
TRF 10112BSS	10-16 X 1-1/2	3	.175/7 ga	4,000	39
TRF 12114BSS	12-14 X 1-1/4	3	.210/5 ga	4,000	44
TRF 12112BSS	12-14 X 1-1/2	3	.210/5 ga	3,000	40
TRF 142BSS	1/4-14 X 2	3	.210/5 ga	1,500	36

SQUARE SOCKET PAN HEAD - TAPPING

18.8 STAINLESS STEEL PASSIVATED



* w/EPDM washer

Part No.	Size	Point	Case Qty.	Case Wt.	
STA 812BSS	8 X 1/2	A	15,000	31	
STA 812BSSN	8 X 1/2	A	w/EPDM washer	7,000	36
STA 834BSSN	8 X 3/4	A	w/EPDM washer	6,000	34

STITCH LAPPING SCREW

410 STAINLESS STEEL HARDENED RUSPRO® COATED

Available with Bonded EPDM 18-8 Stainless Steel Washer



* w/EPDM washer

Part No.	Description	AF Point	Case Qty.	Case Wt.
SRH 1478BSS	1/4-14 X 7/8	5/16" I	3,500	50
SRH 1478BSSN	1/4-14 X 7/8 w/EPDM washer	5/16" I	2,500	37

SHARP POINT SELF-PIERCING

- Twinfast thread design for sheet metal industry



Zinc Plated
New size in red

HEX WASHER HEAD

Part No.	Head Style	Size	Case Qty.	Case Wt.
STHS 8916B	Hex/Socket	8 X 9/16	10,000	33
STH 8916B *	Hex	8 X 9/16	10,000	33
STH 834B	Hex	8 X 3/4	10,000	41
STH 81B	Hex	8 X 1	8,000	41
STH 8114B	Hex	8 X 1-1/4	7,000	43
STH 8112B	Hex	8 X 1-1/2	5,000	49
STH 1038B	Hex	10 X 3/8	10,000	43
STH 1012B	Hex	10 X 1/2	10,000	48
STH 1058B	Hex	10 X 5/8	8,000	42

PAINTED HEAD

STH 638BW	Hex/White	6 X 3/8	15,000	31
STH 8916BW	Hex/White	8 X 9/16	10,000	33
STH 834BTZ	Hex/Black	8 X 3/4	10,000	33
STH 81BW	Hex/White	8 X 1	10,000	42
STH 8114BAW	Hex/Arctic white	8 X 1-1/4	7,000	43
STH 8112BW	Hex/White	8 X 1-1/2	5,000	49
STH 102BW	Hex/White	10 X 2	2,000	24

SOCKET PAN HEAD



Zinc Plated

Part No.	Head Style	Size	Case Qty.	Case Wt.
STP 638BW	Socket pan white	6 X 3/8	15,000	31
STP 658BW	Socket pan white	6 X 5/8	15,000	35
STP 658B	Socket pan	6 X 5/8	15,000	35
STP 8916B *	Socket pan	8 X 9/16	10,000	34
STP 834B	Socket pan	8 X 3/4	10,000	42
STP 81B	Socket pan	8 X 1	10,000	50
STP 8114B	Socket pan	8 X 1-1/4	7,000	43
STP 8112B	Socket pan	8 X 1-1/2	6,000	46

PHILLIPS MODIFIED TRUSS HEAD



Zinc Plated

Part No.	Head Style	Size	Case Qty.	Case Wt.
SPW 8916B *	Phillips	8 X 9/16	10,000	30
SPW 834B	Phillips	8 X 3/4	10,000	49
SPW 81B	Phillips	8 X 1	8,000	45
SPW 8114B	Phillips	8 X 1-1/4	5,000	33
SPW 8112B	Phillips	8 X 1-1/2	4,000	31
SPW 82B	Phillips	8 X 2	2,000	25
SPW 8212B	Phillips	8 X 2-1/2	2,000	24

PAINTED HEAD

SPW 8916BW	Phillips white	8 X 9/16	10,000	26
SPW 834BW	Phillips white	8 X 3/4	10,000	43
SPW 8114BW	Phillips white	8 X 1-1/4	5,000	32
SPW 82BW	Phillips white	8 X 2	2,000	25
SPW 8212BW	Phillips white	8 X 2-1/2	2,000	24
SPW 83BW	Phillips white	8 X 3	1,000	33
SPW 102BW	Phillips white	10 X 2	2,000	25

* Available in Super Pak Jar (See Page 31)

SIDE LAP - HVAC SCREWS

HEX WASHER HEAD

- Attaches multiple layers of light gauge sheet metal
- Designed for connecting spiral duct sections



Zinc Plated

Part No.	Head Style	Size	Case Qty.	Case Wt.
UTH 812B	Hex	8 X 1/2	10,000	36
UTH 1034B *	Hex	10 X 3/4	8,000	62

U-DRILLS® APPLICATION GUIDE

Enquire with customer service

The infographic displays a wide range of U-DRILLS products and their applications. It includes sections for:

- Specialized:** Cement Board Screws, Framing Screws, Machine Screws, Tapping 18-8 S.S. Passivated, Eye Lap Screws, Side Lap / HVAC Screws.
- Self Drilling:** Zinc Plated - Steel to Steel, Zinc Plated - Steel to Steel, Zinc Plated - Steel Lapping, RUSPRO® Coated, RUSPRO® 410 Stainless Steel, Zinc Plated - Wood to Steel, RUSPRO® Coated Heavy Gauge Applications.
- Self Piercing:** Zinc Plated - Steel to Steel.
- Other sections:** Screw Characteristics, Corrosion Protection, Strength Characteristics, BONDED EPDM SEALING WASHERS.

At the bottom, it shows a dimension of 23.5" and the UCAN logo.

CORROSION RESISTANT COATING

RUSPRO® and other coating can be applied to all screws.

PAINTED CREW HEADS

- Available in a wide range of colours, applied to screw heads.
- Custom colours available on request

CUSTOM SERVICES

NEED SOMETHING SPECIAL?

We can offer timely delivery and very competitive prices on most types and sizes of custom screws.

OVAL ZINC PLATED COUNTERSUNK HEAD



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TPO 611B	6-20 X 1	2	.090/13 ga	12,000	36
TSO 6114B	6-20 X 1-1/4	2	.090/13 ga	10,000	40

SELF ZINC PLATED TAPPING SCREWS



Part No.	Size	Head	Point	Case Qty.	Case Wt.
AST 6112B	6 X 1-1/2	Truss	A	6,000	30
AHT 6112B	6 X 1-1/2	HWH	A	6,000	30

FLAT ZINC PLATED COUNTERSINK HEAD



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TSF 858B	8-18 X 5/8	2	.100/13 ga	10,000	27
TSF 834B	8-18 X 3/4	2	.100/13 ga	10,000	27

SPECIALTY APPLICATIONS

SHARP POINT SCREWS

RUSPRO® Coated



Part No.	Size	Head Style	Case Qty.	Case Wt.
SRP 1058B	10 X 5/8	Socket pan	8,000	41
SRP 102B	10 X 2	Socket pan	2,000	24
SRU 1034B	10 X 3/4	Socket flat undercut	8,000	44
SRF 10112B	10 X 1-1/2	Socket flat - Type "A"	4,000	32

MACHINE SCREWS

- Square socket round head
- RUSPRO® Coated



Part No.	Size	Head Style	Case Qty.	Case Wt.
MSR 1434B	1/4-20 X 3/4	Round head	4,000	51
MSR 141B	1/4-20 X 1	Round head	3,000	48
MSR 142B	1/4-20 X 2	Round head	1,500	22
MSR 14212B	1/4-20 X 2 -1/2	Round head	1,000	12

CB SCREWS

- For cement board
- Phillips wafer head with underside ribs
- RUSPRO® corrosion resistant coated

CB SPOON POINT SCREWS

- For wood studs and light metal studs up to 20ga
- For cement board



Part No.	Size	Case Qty.	Case Wt.
CBS 114B	8 X 1-1/4	5,000	31
CBS 158B	8 X 1-5/8	4,000	30
CBS 214B	8 X 2-1/4	2,500	26

CB SELF DRILLING SCREWS

- For metal studs up to 12ga
- For cement board



Part No.	Size	Case Qty.	Case Wt.
CBT 114B	8 X 1-1/4	5,000	31
CBT 158B	8 X 1-5/8	4,000	31

Available in Super Pak Jar (See Page 32)

ACOUSTIC LAG SCREWS

EYE LAG FOR WOOD



Part No.	Size	Eye Dia.	Pkg. Qty.	Case Qty.	Case Wt.
ELS 143	1/4 X 3	.210"	100	1,000	24
ELS 143B	1/4 X 3	.210"	-	1,000	23

EYE LAG FOR METAL



Part No.	Size	point	Eye Dia.	Case Qty.	Case Wt.
TLS 142B	1/4 - 14 X 2	2	.210"	1,500	35
TLS 142BN	1/4 - 14 X 2	2	.210"	1,000	29

Available in Super Pak Jar (See Page 32)

INSTALLATION TOOL FOR ACOUSTIC LAG SCREWS



Part No.
DLS3



Increase sales with our **UCAN POP display**

- Space saver - small 24 x 36" footprint, yet holds up to 354 SUPER PAKS
- Spotlights many popular fasteners
- Includes 6 shelves for anchors and 7 pegs to showcase drill bits



- Clear plastic **Super Paks jars** are convenient and economical packaging for contractors and service people.
- fit easily onto service truck racking and tool carrier trays. large diameter screw on lid for easy access.

LIGHT - MEDIUM APPLICATIONS

SOCKET PAN HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Jar Qty.	Case Qty.	Case Wt.
TSP 612K	6-20 X 1/2	2	.090/13 ga	1000	6	13
TSP 812K	8-18 X 1/2	2	.100/12 ga	1000	6	20
TSP 858K	8-18 X 5/8	2	.100/12 ga	1000	6	23
TSP 834K	8-18 X 3/4	2	.100/12 ga	1000	6	26
TSP 81K	8-18 X 1	2	.100/12 ga	1000	6	32
TSP 8112K	8-18 X 1-1/2	2	.100/12 ga	500	6	22
TSP 1012K	10-16 X 1/2	2	.110/12 ga	1000	6	25
TSP 1058K	10-16 X 5/8	3	.175/7 ga	1000	6	31
TSP 1034K	10-16 X 3/4	3	.175/7 ga	500	6	18
TSP 101K	10-16 X 1	3	.175/7 ga	500	6	22
TSP 10114K	10-16 X 1-1/4	3	.175/7 ga	500	6	25
TSP 10112K	10-16 X 1-1/2	3	.175/7 ga	400	6	24

HEX WASHER HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Jar Qty.	Case Qty.	Case Wt.
THW 812K	8-18 X 1/2	2	.100/12 ga	1000	6	21
THW 858K	8-18 X 5/8	2	.100/12 ga	1000	6	26
THW 834K	8-18 X 3/4	2	.100/12 ga	1000	6	26
THW 81K	8-18 X 1	2	.100/12 ga	800	6	26
THW 8112K	8-18 X 1-1/2	2	.100/12 ga	500	6	22
THW 1012K	10-16 X 1/2	2	.100/12 ga	1000	6	29
THW 1058K	10-16 X 5/8	3	.175/7 ga	1000	6	32
THW 1034K	10-16 X 3/4	3	.175/7 ga	500	6	19
THW 101K	10-16 X 1	3	.175/7 ga	500	6	22
THW 10114K	10-16 X 1-1/4	3	.175/7 ga	500	6	25
THW 10112K	10-16 X 1-1/2	3	.175/7 ga	300	6	19
THW 1234K	12-14 X 3/4	3	.210/5 ga	500	6	26
THW 121K	12-14 X 1	3	.210/5 ga	500	6	28
THW 12112K	12-14 X 1-1/2	3	.210/5 ga	300	6	23
THW 122K	12-14 X 2	3	.210/5 ga	250	6	14
THW 1434K	1/4-14 X 3/4	3	.220/4 ga	300	6	22
THW 141K	1/4-14 X 1	3	.220/4 ga	300	6	26
THW 14114K	1/4-14 X 1-1/4	3	.220/4 ga	300	6	30
THW 14112K	1/4-14 X 1-1/2	3	.220/4 ga	250	6	39

PHILLIPS MODIFIED TRUSS HEAD

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Jar Qty.	Case Qty.	Case Wt.
TPW 812K	8-18 X 1/2	2	.100/12 ga	1,000	6	28

SHARP POINT SCREWS



Part No.	Head Style	Size	Jar Qty.	Case Qty.	Case Wt.
UTH 1034K	IHW	10-16 X 3/4	700	6	24
STH 8916K	IHW	8 X 9/16	1,000	6	21
STP 8916K	soc.pan	8 X 9/16	1,000	6	22

PHILLIPS MODIFIED TRUSS HEAD SHARP POINT

Zinc Plated



SPW 8916K		8 X 9/16	1,000	6	23
-----------	--	----------	-------	---	----

STAINLESS STEEL

SOCKET PAN HEAD

410 Stainless Steel Hardened RUSPRO® Coated



Part No.	Size	Point	Drilling Capacity	Jar Qty.	Case Qty.	Case Wt.
TRP 812KSS	8-18 X 1/2	2	.100/12 ga	1,000	6	18
TRP 1034KSS	10-16 X 3/4	3	.175/7 ga	500	6	18

HEX WASHER HEAD

410 Stainless Steel Hardened RUSPRO® Coated



TRH 812KSS	8-18 X 1/2	2	.100/12 ga	1,000	6	18
TRH 1034KSS	10-16 X 3/4	3	.175/7 ga	500	6	19
TRH 1234KSS	12-14 X 3/4	3	.210/5 ga	500	6	28
TRH 121KSS	12-14 X 1	3	.210/5 ga	500	6	30
TRH 1434KSS	1/4-14 X 3/4	3	.220/4 ga	300	6	23
TRH 141KSS	1/4-14 X 1	3	.220/4 ga	300	6	26

PHILLIPS MODIFIED TRUSS HEAD

410 Stainless Steel Hardened RUSPRO® Coated



Part No.	Size	Point	Drilling Capacity	Case Qty.	Case Wt.
TRW 812KSS	8-18 X 1/2	2	.100/12 ga	6000	18

HEAVY GAUGE APPLICATIONS

HEX WASHER HEAD

RUSPRO® Coated




Part No.	Size	Point	Drilling Capacity	Jar Qty.	Case Qty.	Case Wt.
TRH 1278K4	12-24 X 7/8	4	.312/ 5/16"	500	6	26
TRH 12114K5	12-24 X 1-1/4	5	.500/ 1/2"	500	6	37
TRH 12112K5	12-24 X 1-1/2	5	.500/ 1/2"	300	6	28
TRH 122K5	12-24 X 2	5	.500/ 1/2"	250	6	27

WOOD TO METAL APPLICATIONS

SOCKET WAFER HEAD WITHOUT REAMER

Zinc Plated



Part No.	Size	Point	Drilling Capacity	Jar Qty.	Case Qty.	Case Wt.
TSW 1034K	10-24 X 3/4	3	.175/7 ga	500	6	18
TSW 101K	10-24 X 1	3	.175/7 ga	500	6	23
TSW 10114K	10-24 X 1-1/4	3	.175/7 ga	300	6	26

SOCKET WAFER HEAD REAMER SCREWS

Zinc Plated




TSW 10112RK	10-24 X 1-1/2	3	.175/7 ga	300	6	19
TSW 122RK	12-24 X 2	4	.312/5/16"	200	6	24
TSW 12212RK	12-24 X 2-1/2	4	.312/5/16"	150	6	23
TSW 123RK	12-24 X 3	4	.312/5/16"	100	6	24

ACOUSTIC EYE LAG SCREW

Zinc Plated

1 Installation tool (DLS 3) in each jar

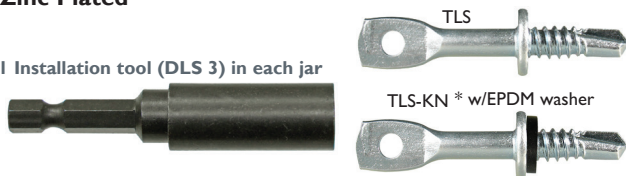

Part No.	Size	point	Jar Qty.	Case Qty.	Case Qty.
TLS 142K	1/4 X 2	2	200	6	24
TLS 142KN	1/4 X 2	2	150	6	24

CB SCREWS



Part No.	Size	point	Jar Qty.	Case Qty.	Case Qty.
CBS 114K	8 X 1-1/4		500	6	18
CBS 158K	8 X 1-5/8		500	6	23
CBS 214K	8 X 2-1/4		250	6	16
CBT 114K	8 X 1-1/4	2	500	6	19
CBT 158K	8 X 1-5/8	2	500	6	23

ZAMAC PIN BOLTS




Part No.	Size	Jar Qty.	Case Qty.	Case Wt.
ZAM 31678K	3/16 X 7/8	350	6	26
ZAM 141K	1/4 X 1	200	6	24
ZAM 14114K	1/4 X 1-1/4	150	6	15

NYLON PIN BOLTS



Part No.	Size	Jar Qty.	Case Qty.	Case Wt.
NYL 1434K	1/4 X 3/4	300	6	6
NYL 141K	1/4 X 1	200	6	5
NYL 14112K	1/4 X 1-1/2	100	6	6

TWISTER® ANCHOR



Part No.	Jar Qty.	Case Qty.	Case Wt.
JET 100K ^{*without screw}	150	6	14
JET 100KS ^{*includes philips screws}	150	6	14
TWISTER-KS ^{*includes philips screws}	1	12	19

BLUE PLASTIC PLUGS

1 masonry bit in each jar



Part No.	Size	Drill Size	Jar Qty.	Case Qty.	Case Wt.
UBP 68K	6-8 X 3/4	3/16	1000	12	9
UBP 810K	8-10 X 7/8	3/16	1000	12	8
UBP 1012K	10-12 X 1	1/4	500	12	9

BLUE PLASTIC PLUGS BULK PACK

Part No.	Size	Drill Size	Case Qty.	Case Wt.
UBP 68B	6-8 X 3/4	3/16	50,000	29
UBP 810B	8-10 X 7/8	3/16	40,000	25
UBP 1012B	10-12 X 1	1/4	20,000	26
UBP 1416B	14-16 X 1-3/8	5/16	10,000	25

YELLOW PLASTIC PLUGS

1 masonry bit in each jar



Part No.	Size	Drill Size	Anchor Qty.	Screw Qty.	Case Qty.	Case Wt.
UYP 48K	4-8 X 7/8	3/16	1000		12	10
UYP 812K	8-12 X 1-1/4	1/4	400		12	10
UYP 812KS	8-12 X 1-1/4	1/4	200	200	12	10

(#8 Square socket screw)

YELLOW PLASTIC PLUGS BULK PACK

Part No.	Size	Drill Size	Case Qty.	Case Wt.
UYP 48B	4-6-8 X 7/8	3/16	40,000	39
UYP 812B	8-10-12 X 1-1/4	1/4	18,000	25
UYP 1216B	12-14-16 X 1-1/2	5/16	10,000	25

FASTENER SELECTION GUIDELINES

UCAN Fastening Products' anchoring line ranges from light duty plastic anchors to the most technically advanced types of heavy load anchors. This wide variety of high quality fasteners provides the user with the flexibility to select the anchor best suited for the application. For this reason, prior to selecting the type, size and quantity of fasteners required, the following factors should be considered:

- Type and the condition of the base material
- Installation procedure
- Corrosion considerations
- The desired load transfer by the fastener to the base material
- Dimensions of the base material
- Anchor spacing and edge distance
- Safety factor required
- Type of load(s) acting on the fastener (eg: static, dynamic, seismic)

In all applications, the design engineer or architect responsible for the project should verify the load bearing capacity and other performance criteria.

UCAN fasteners are designed to minimize the influence of the installation technique on the anchor's holding power. However, basic installation procedures listed for each anchor in our technical and sales literature should be followed, to ensure the integrity of the anchoring assembly.

- Correct hole geometry is important to guarantee published load performance. The UCAN carbide drill bit,

manufactured to ISO (mm) and ANSI (in) standards, will produce holes which are optimal for metric or fractional anchors. Incorrect hole geometry can cause reduced holding power, and installation difficulties.

- Hole cleaning is an important and easy step to ensure maximum anchor performance. For most expansion and adhesive anchors, cleaning the hole with a nylon or wire brush and blow out pump is all that is required. These steps will remove concrete dust and debris from the hole which could reduce the effectiveness of the anchor.
- After placement of the anchor, turning the nut or hex bolt tightens down the assembly. For engineered or critical applications, specific torque should be applied using a calibrated torque wrench.

A safety factor must be used to compensate for variations in loading, material strength and installation conditions and to ensure minimum anchor displacement. It is the designer's responsibility to analyze all conditions and select the appropriate safety factor.

For predominantly static loading in allowable stress design, UCAN recommends the following safety factors:

- For mechanical and adhesive anchors 4:1
- For plastic anchors 5:1
- For PA system in concrete 8:1
- For PA system in steel 5:1

WEDGE ANCHOR LENGTH IDENTIFICATION SYSTEM

HEAD STAMP	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
Anchor Length (inches)	From 1-1/2	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	6-1/2	7	7-1/2	8	8-1/2	9	9-1/2	10	11	12
Up to but not including	2	2-1/2	3	3-1/2	4	4-1/2	5	5-1/2	6	6-1/2	7	7-1/2	8	8-1/2	9	9-1/2	10	11	12	13

DRIVER SIZES FOR UCAN SCREWS

U-DRILLS®	Magnetic Nut Setter	Square Recess Bit	Phillips Bit
# 6	1/4	1	2
# 8	1/4	2	2
# 10	5/16	2	2
# 12	5/16	3	3
# 14	3/8	3	3
SUPER SCRU-IT®			
3/16	1/4	2	2
1/4	5/16	3	3

Note: For SHW 1478B use 5/16 Magnetic Nut Setter


U-DRILLS® PERFORMANCE DATA

STRENGTH CHARACTERISTICS				
Fastener Size	Minimum Breaking Torque (in/lbs)	Tensile Strength (lbs)	Shear Strength (lbs)	Recommended Drilling Speed (rpm)
#6	30	1,102	652	1,800 - 2,500
#8	42	1,529	967	
#10	65	2,181	1,439	1,000 - 1,800
#12	96	3,305	2,068	
1/4-14	150	4,275	2,540	

For more information on anchor selection and design criteria, as well as the latest performance data, please contact UCAN or visit our website at www.ucanfast.com


Kesternich (DIN 50018 - 2.0L SO₂) Test (Acidic Industrial Atmosphere)

Electroplated Zinc
Cadmium plated (0.003")
Mechanically plated zinc
Hot dip galvanized
RUSPRO®



Salt Spray Test ASTM B117

Electroplated Zinc
Mechanically plated zinc
Hot dip galvanized
Cadmium plated (0.003")
RUSPRO®



CORROSION RESISTANCE DATA

ZINC PLATING

- ASTM F 1941-00
- plating thickness: 0.0002" - 0.0003"

RUSPRO®

The RUSPRO® multi layer coating provides outstanding resistance against road salt, humidity, solvents and other corrosive elements.

- Exceptional corrosion resistance
- Excellent acid (SO₂) resistance
- Bonded multi layer coating to resist abrasion


Typical RUSPRO® coating composition:
4.0 microns (0.00016") zinc plating
1.0 microns (0.00004") phosphate
5.0 microns (0.0002") ceramic top coat

Colour: silver / blue / white

Salt Spray Resistance (ASTM B117 - 03)
1,000 hours (5-10% red rust)

Kesternich Test DIN 50028 - (2.0 liter SO₂)
15-20 cycles (<10% red rust)

DRILL POINT CAPACITY

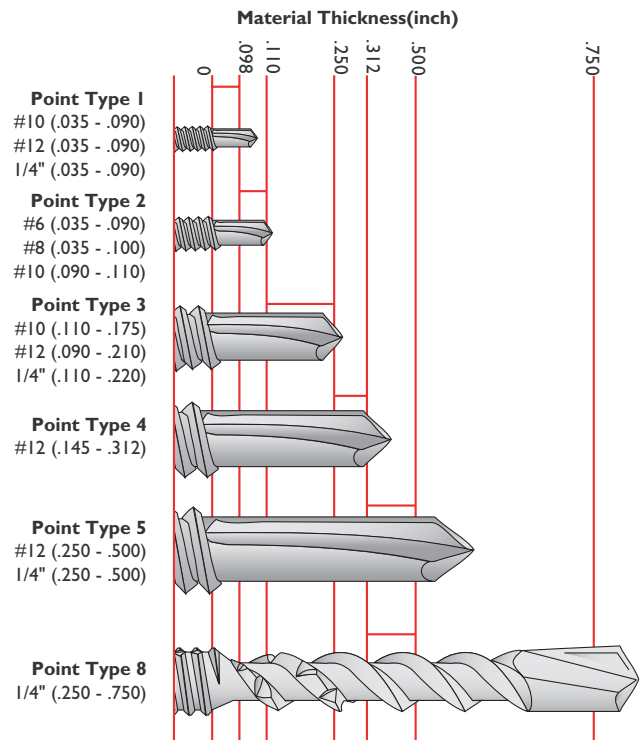

Corrosion data shown on this page are based on independent laboratory testing on the fasteners only. It is the user's responsibility to verify the fastener's suitability to any particular corrosive application condition.

PLEASE NOTE:

Items may not be exactly as depicted in this price list.

The technical data shown in this price list are correct at the time of publishing.

For the most up to date information and SDS please visit our website at www.ucanfast.com.


Established in 1967 by Harry Weitz, UCAN FASTENING PRODUCTS has been supplying high quality masonry and metal fasteners to the construction industry for over 50 years. With his extensive technical background in construction and architecture, Harry has always possessed a keen interest in fastener design, function and application.

Starting out as a wholesale distributor of innovative fastening products, made in the USA and Europe, UCAN was instrumental in bringing wedge anchors, concrete screws and galvanized spiral nail anchors to the Canadian market in the 1950s and 60s. Harry personally developed the EP932 tie wire anchor, which reduced installation time by 50%, as well as UCAN SCRU-IT®'s unique and efficient scalloped cutting thread. These fasteners gained immediate success in the marketplace.




From its' humble beginnings in part of a cramped warehouse, UCAN currently operates from an efficient 35,000 sq ft facility in Toronto.

UCAN's tight knit team of experienced, caring and knowledgeable outside and inside employees, provide an unrivalled level of customer service. Most orders are shipped the day they are received and order fill rates generally exceed 97%. Also key to UCAN's success is the company's philosophy of constant product improvement through R&D and strict quality control at all stages of production.

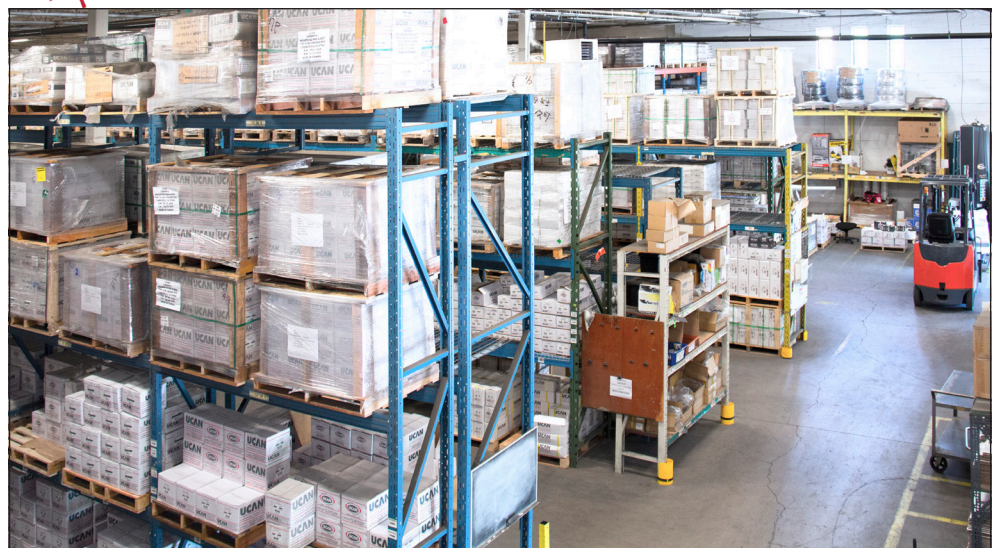

UCAN remains a family owned business. While still involved at UCAN, Harry has passed the reins of the daily operation to his son, Jeremy who has been working at UCAN for over 30 years.

Jeremy and Harry Weitz

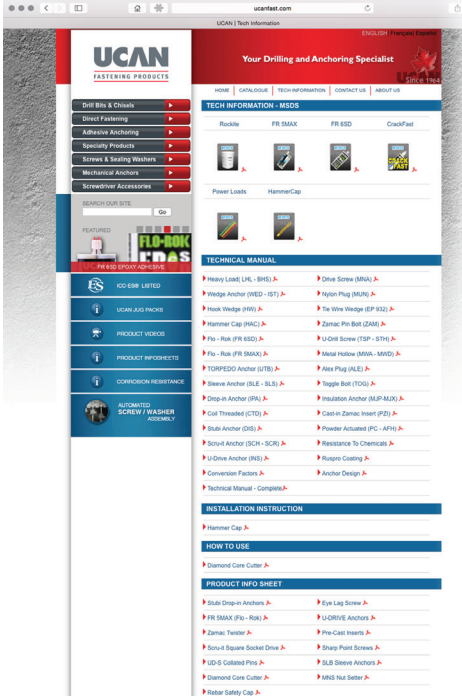

For more information on anchor selection and design criteria, as well as the latest performance data, please contact UCAN or visit our website at www.ucanfast.com

DISCLAIMER OF WARRANTIES AND LIABILITY

UCAN Fastening Products (UCAN) accepts no responsibility in case of any damage, loss, or injury, direct, indirect, incidental or consequential that results from the use of, or the inability to use, the text and technical data contained in the current or any subsequent editions and/or versions of the price list, technical manual or any other UCAN publications. All recommendations or suggestions for use of UCAN products are made without guarantee. Furthermore, UCAN accepts no responsibility for the performance of its products since the conditions of use are not under its control. Goods proved to be defective will be replaced, but UCAN accepts no responsibility beyond the cost of the goods supplied. Furthermore, UCAN accepts no responsibility in case of damage that results from non-compliance with the manufacturer's installation instructions, improper sizing of anchor fastening by customer, inadequate load bearing properties of anchoring base material, improper applications, or any other factor not brought to the prior attention of UCAN. Except as provided in this clause, UCAN accepts no liability with respect to delay in delivery or any injury, damage or loss resulting from the use of its products.

Limitation of damages – UCAN will not be liable to DISTRIBUTOR for loss of future sales, loss of profits or goodwill, loss of use or incidental, indirect, consequential or special damages. UCAN's liability under this agreement, including its indemnification obligations, will not individually or in the aggregate exceed the amounts paid to UCAN by DISTRIBUTOR for the products giving rise to such liability. EXCEPT FOR THE APPLICABLE LIMITED WARRANTY, UCAN MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED (INCLUDING IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT) CONCERNING ANY PRODUCT, AND ALL OTHER GUARANTEES, WARRANTIES, CONDITIONS AND REPRESENTATIONS, EITHER EXPRESS OR IMPLIED, ARE EXCLUDED

UCAN Fastening Products is a division of
British Fastening Systems Limited



BUILDING LASTING CONNECTIONS



155 Champagne Drive, Unit 10
Toronto, Ontario, M3J 2C6
Tel.: 416.631.9400
Fax: 416.631.9426
Email: sales@ucanfast.com

www.ucanfast.com

©2021 UCAN FASTENING PRODUCTS

