

# UCAN

FASTENING PRODUCTS

# STUBi

## DROP-IN ANCHOR

### 3/8" Short Drop-In Anchor for Hollow Core Slabs

#### FEATURES

- Pre-assembled with expander plug
- Lip offers flush installation
- Shallow embedment design

#### TYPICAL APPLICATIONS

- Overhead fastenings into hollow core pre-cast and post tensioned slabs

#### LIMITATIONS

- Not recommended for uncured concrete (less than 7 days old), lightweight concrete or brick


#### DESCRIPTION

The **UCAN STUBi Drop-in Anchor** is an internally threaded, flush mounted expansion anchor for shallow embedment anchoring applications (3/4"). The STUBi anchor is pre-assembled with an internal expander plug and is zinc plated.

The matching UCAN setting tool provides correct setting every time. The anchor is designed to provide reliable fastening in hollow core panels, pre-cast and post tension slabs.

| INSTALLATION DATA |            |           |
|-------------------|------------|-----------|
| Anchor Size       | Drill Size | Embedment |
| Inch              | Inch       | Inch      |
| 3/8               | 1/2        | 3/4       |

| AVERAGE ULTIMATE LOADS<br>IN 4,000 PSI CONCRETE |      |       |       |
|---|------|-------|-------|
| Tension   |      | Shear |       |
| Lbs   | KN   | Lbs   | KN    |
| 1850  | 8.23 | 2950  | 13.12 |

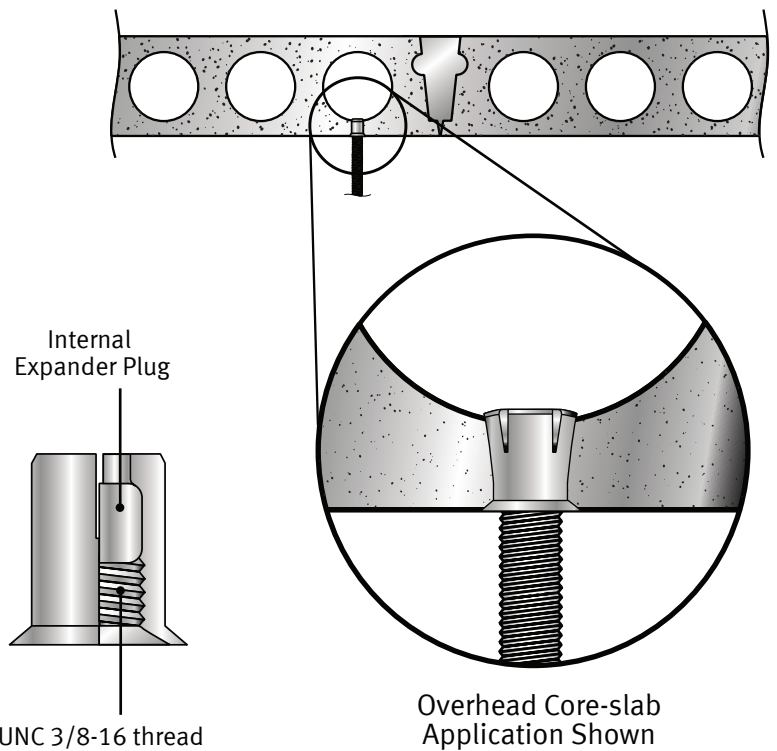

Internal Expander Plug  
UNC 3/8-16 thread

Overhead Core-slab Application Shown

| UCAN STUBi DROP-IN ANCHOR |                               |            |           |           |          |
|---------------------------|-------------------------------|------------|-----------|-----------|----------|
| Part No.                  | Thread Size                   | Drill Size | Pkg. Qty. | Case Qty. | Case Wt. |
| DIS 3812                  | 3/8"                          | 1/2"       | 100       | 1000      | 32 lbs   |
| DISST                     | <b>SETTING TOOL FOR STUBi</b> |            |           |           |          |

AVAILABLE FROM STOCK

#### UCAN FASTENING PRODUCTS

155 Champagne Drive, # 10  
Toronto, Ont., M3J 2C6

TEL.: 416-631-9400  
FAX: 416-631-9426

E-MAIL: sales@ucanfast.com  
www.ucanfast.com